

Technical data sheet for

SINGLE PAN GAS FRYER 400mm

FN8118G



- 400mm wide single pan fryer
- 90MJ multi-jet target burner
- 25kg / hr production rate
- Easy clean stainless steel open pan
- 18L oil capacity
- V-tank with cool zone
- 30mm drain valve
- Stainless steel exterior
- Easy service
- Fully modular

Overall Construction

- Stainless steel pan
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 0.9mm 430 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- 30mm drain valve
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 2 baskets and stainless steel lid supplied standard

Controls

- Mechanical thermostat
- Thermostat range 100-190°C
- Over-temperature safety cut-out
- Millivolt gas valve system (no electrical supply)
- Flame failure protection

Cleaning and Servicing

- Open stainless steel pan for easy clean
- Easy clean basket support bar
- 30mm drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Technical data sheet for

SINGLE PAN GAS FRYER

400mm

Specifications

Production rate

25kg/hr

Pan Size

Oil capacity 18L (32lbs shortening)

Width 305mm

Length 380mm

Oil frying depth 95mm

Baskets

2 nickel plated wire baskets

140mm W x 335mm D x 145mm H

Nickel plated wire basket grid

Burners

Multi-jet target U-burners

Gas Power

90MJ/hr, 25kW

Gas connection

R 3/4 (BSP) male

40mm from RH side, 24mm from rear,
and 223mm from floor

All units incorporate Natural and LP gas regulator

DIMENSIONS

Width 400mm

Depth 805mm

Height 915mm

Incl. splashback 1130mm

NETT WEIGHT

57kg

PACKING DATA

0.54m³, 97kg

Width 870mm

Depth 495mm

Height 1255mm

GAS TYPES

Available in Natural gas and LP gas

Please specify when ordering

Other gas types on request

OPTIONS AT EXTRA COST

Extra baskets

Side splash guards




Joining caps

Castors

Plinth mounting

Gas conversion kits

FN8118G

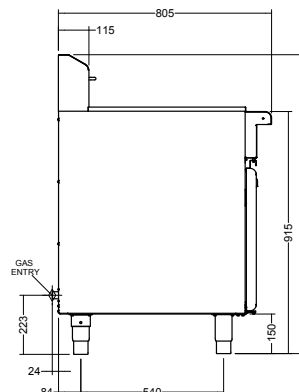

Waldorf
800 SERIES

MOFFAT

Australia
www.moffat.com.au
New Zealand
www.moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited

Christchurch
Telephone 03-389 1007
sales@moffat.co.nz

Auckland
Telephone 09-574 3150
sales@moffat.co.nz



ISO9001
Quality
Management
Standard

Designed and manufactured by

MOFFAT

ISO9001
All Waldorf products are designed and
manufactured by Moffat using the
internationally recognised ISO9001 quality
management system, covering design,
manufacture and final inspection, ensuring
consistent high quality at all times.



AGA Cert No. 6882

In line with policy to continually develop and
improve its products, Moffat Limited reserves
the right to change specifications and design
without notice.

Printed in New Zealand
© Copyright Moffat Limited
Moffat/08.13/1357

