

SKOPE®

Food Storage Series

Fridge, Freezer, Combo

ReFlex ProSpec


featuring



SKOPE-connect™
puts you in control



R290 Natural Refrigerant
a green choice

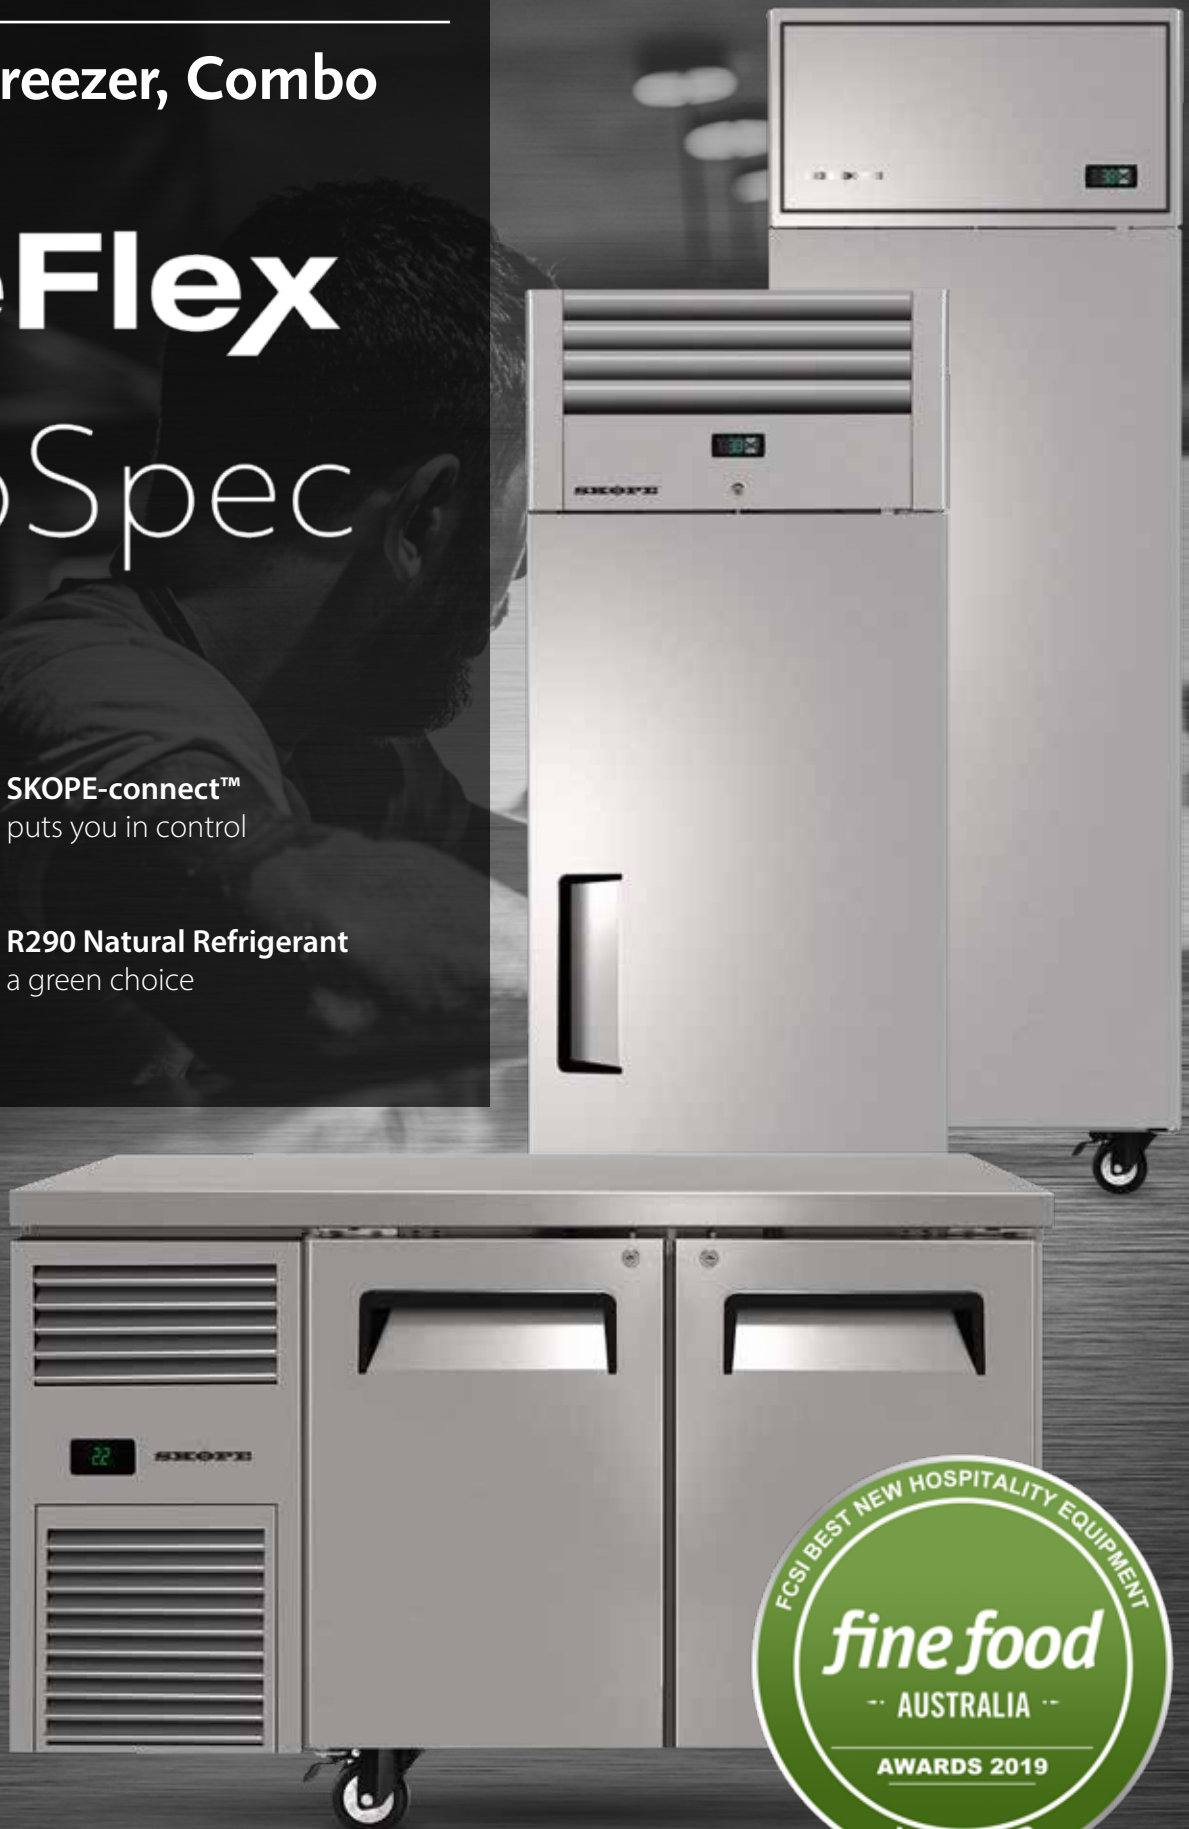

It's time to flex
some muscle



ReFlex

Reliable Strength. Incredible Technology

Unrivalled features at exceptional value

Reduce your energy costs & carbon footprint

Ultra-precise food storage temperatures

Manage, monitor, control from your smartphone

Legendary SKOPE toughness

Award winning series

 SKOPE-connect™

 R290 Natural Refrigerant



ReFlex™ Series

Underbench

Food Storage

Fridge or Freezer
GN Compatible

The award winning ReFlex underbench fridges and freezers provide durable, long-lasting quality and modern features at exceptional value. Designed for food service businesses looking to maximize every dollar, ReFlex combines cutting edge power savings and the time-saving advantages of the free SKOPE-connect app, with traditional SKOPE toughness and temperature consistency.



ReFlex



RF6.UBR.1.SD (Fridge)
RF6.UBF.1.SD (Freezer)



RF7.UBR.2.SD (Fridge)
RF7.UBF.2.SD (Freezer)



RF7.UBR.2.GD (Fridge)




RF7.UBR.3.SD (Fridge)
RF7.UBF.3.SD (Freezer)
RF7.UBR.3.GD (Glass Door Fridge)



RF7.UBR.4.SD (Fridge)

Standard finish: 304 Stainless Steel**

Standard Models: 1, 2, 3 & 4 solid door fridge, 2 & 3 glass door fridge, 1, 2 & 3 solid door freezer



Restaurants / Cafés



Quick Service Restaurants



Clubs / Pubs / Bars



Hospitality Venues



Accommodation



Medical / Aged Care



Schools

Quick Guide

- ✓ Premium build quality
- ✓ Monitor and control with the free SKOPE-connect™ app
- ✓ Very good energy efficiency
- ✓ Operates in 40°C ambient*
- ✓ R290 Natural Refrigerant with minimal environmental impact
- ✓ Premium quality 304 stainless steel outer and inner**
- ✓ Stainless steel benchtop as standard
- ✓ Easy-to-service refrigeration cartridge system
- ✓ Gastronorm compatible*
- ✓ Fridge or freezer models available
- ✓ Wide range of models available; 1 to 4 solid doors, 2 & 3 glass doors
- ✓ Award winning series

Standard Features

Benefits


Front breathing refrigeration system	Built in design to save space
Fan forced ducted airflow*	Consistent temperature for food safety
Door activated interior LED lighting*	Easy to find stored products
Key locks on all doors	Extra security
Self closing, self sealing doors	Convenient, reliable closure
Replaceable long life magnetic door gaskets	Reliable door seal for improved efficiency
Coved interior floors & premium grade stainless steel	Very durable and easy to clean
Heated fascia*	Eliminates condensation
Easy grip handle design	Comfortable and convenient access
Supplied with lockable front castors, non-locking rear castors (135mm) and a set of adjustable legs (145-185mm)*	For easy installation, positioning & relocation

Options

Notes

- 1 year extended warranty

*excluding 1 door fridge and freezer
**430 Stainless Steel used in some small functional areas of the cabinet.



ReFlex™ Series

Underbench

Cabinet

Solid Doors	Stainless Steel, self closing, lockable, swing
Glass Doors	Double glazed, double Low-E Argon
Shelves	Grey Plastic Coated Wire
Breathes from/Expels to	Front/Front
External & Internal	304 AISI Stainless Steel
Coved Floor	Yes
Worktop (45mm thick)	0.7mm 304 AISI Stainless Steel over insulating cyclopentane foamed core (excluding 1 door models)

Performance

Temperature Range	M1 Fridge: -1 to 4°C (adjustable with SKOPE-connect -2 to 10°C, 1 door adjustable 1 to 15°C) L1 Freezer: -21 to -18°C (adjustable with SKOPE-connect -26 to -12°C)
-------------------	---



Climate Class	5 (Heavy Duty) 40°C / 40%RH
Maximum Ambient Temperature	40°C (1 door fridge and freezer 30°C)

Refrigeration





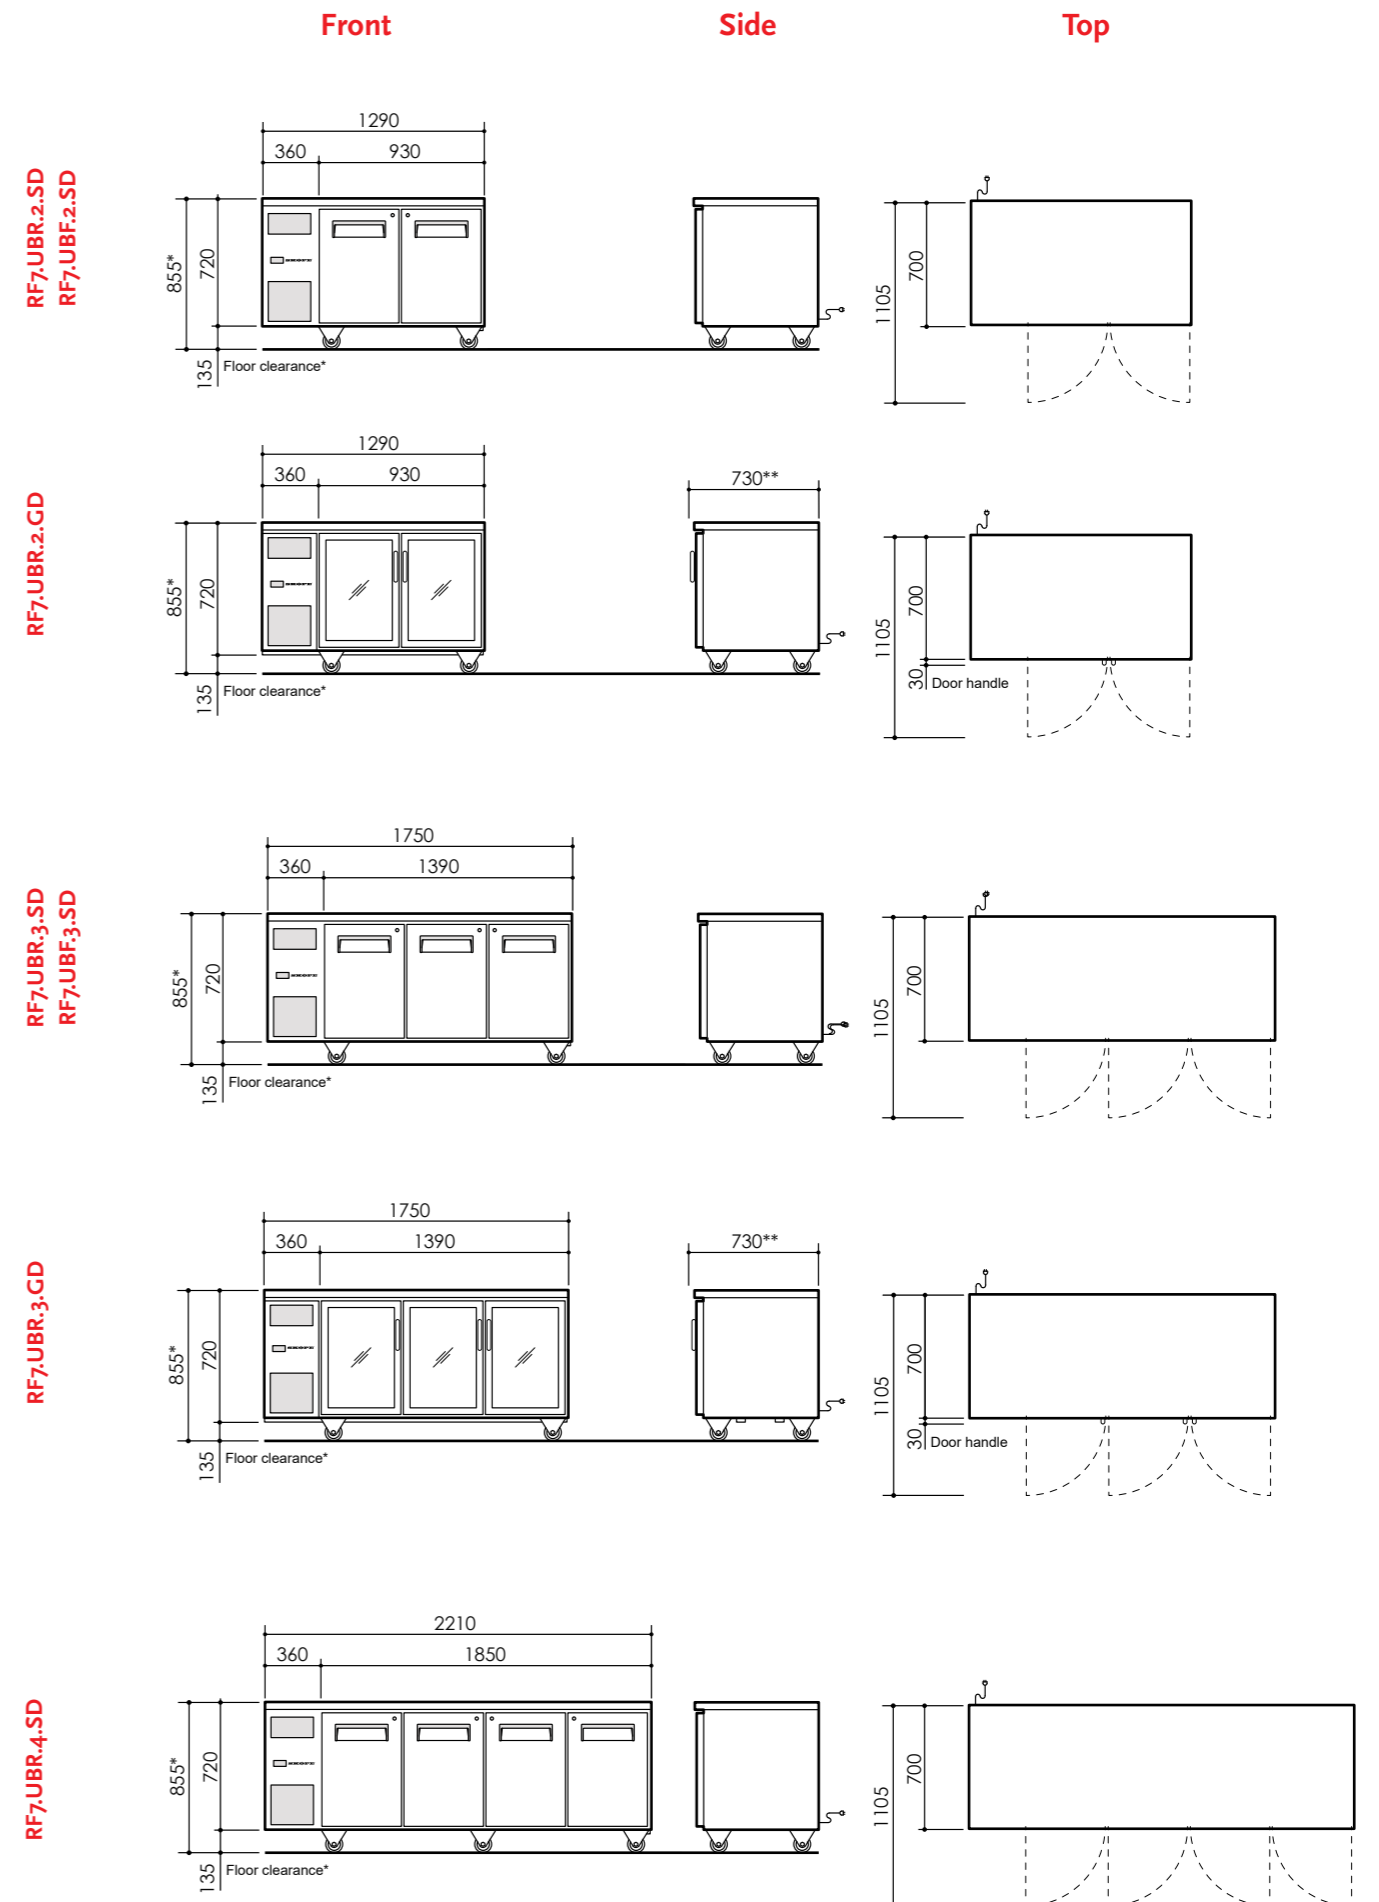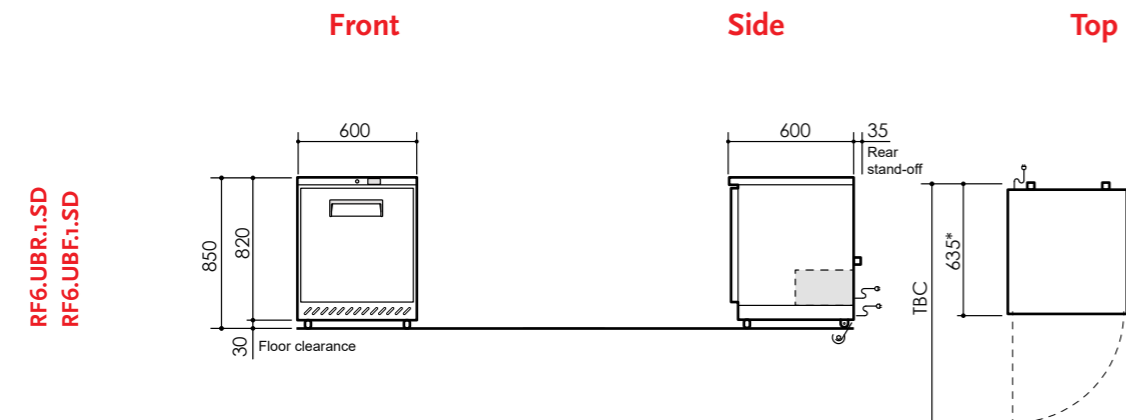

Controller	Electronic with SKOPE- connect™
Connectivity	Via Bluetooth
System	Side Mount, Removable, Self Contained (1 door fridge and freezer built-in system)
Refrigerant	R290 Natural Refrigerant (1 door fridge R600a)
Drainage	No plumbing required

Electrical

Power Supply	220-240 Volts a.c 50 Hz single phase supply
Plug	10 Amp 3 pin & 2.6m cable (1 door models 2m) where applicable cabinets are supplied with correct regional plug types



Specifications

	Model ID	Fridge/Freezer	Doors	Door Type	Door Hinge	External Dimensions (W x D x H* mm)	Adjustable Shelves (No.)	Adjustable Shelves Size (W x D mm)	Interior Lighting**	Total Floor Area (m ²)	Weight (kg)	Gross Internal Volume (litres)	Refrigerant / Charge	Current Draw (Amps)	Nominal Capacity (Watts)
	RF6.UBR.1.SD	Fridge	1	Solid	RH	600 x 635 x 850	2	470 x 395 490 x 180 (rests on floor)	No	0.38	50	129	R600a/54g	1.0	200
	RF6.UBF.1.SD	Freezer	1	Solid	RH	600 x 635 x 850	2	470 x 395 490 x 180 (rests on floor)	No	0.38	52	129	R290/40g	1.5	250
	RF7.UBR.2.SD	Fridge	2	Solid	LH/RH	1290 x 700 x 855	4	395 x 510	1	0.90	106	248	R290 / 80g	2.0	450
	RF7.UBF.2.SD	Freezer	2	Solid	LH/RH	1290 x 700 x 855	4	395 x 510	1	0.90	112	248	R290 / 90g	4.0	500
	RF7.UBR.2.GD	Fridge	2	Glass	LH/RH	1290 x 730 x 855	4	395 x 510	1	0.90	116	248	R290 / 80g	2.0	450
	RF7.UBR.3.SD	Fridge	3	Solid	LH/LH/RH	1750 x 700 x 855	6	395 x 510 (Outer) 455 x 510 (Middle)	2	1.23	130	387	R290 / 95g	2.0	650
	RF7.UBF.3.SD	Freezer	3	Solid	LH/LH/RH	1750 x 700 x 855	6	395 x 510 (Outer) 455 x 510 (Middle)	2	1.23	136	387	R290 / 90g	4.0	500
	RF7.UBR.3.GD	Fridge	3	Glass	LH/LH/RH	1750 x 730 x 855	6	395 x 510 (Outer) 455 x 510 (Middle)	2	1.28	135	387	R290 / 95g	2.0	650
	RF7.UBR.4.SD	Fridge	4	Solid	LH/LH/RH/RH	2210 x 700 x 855	8	395 x 510 (Outer) 455 x 510 (Middle)	3	1.55	155	526	R290 / 95g	2.0	650

* Cabinet height with fitted castors: 855mm. Cabinet height variation with supplied adjustable legs: 865 - 905mm. Cabinet height with no castors or legs: 720mm.

Before installing these cabinets please refer to the models specification sheet for dimensional tolerances and ventilation requirements
For full product technical and specification information always refer to the models specification sheet; download at skope.com

** Door Activated Interior Lighting (not available on 1 door models)

Underbench: 400mm 4W LED

ReFlex™ Series

Upright

Food Storage

Fridge, Freezer or Combo

The award winning ReFlex upright food storage fridges and freezers offer premium food safety security and smart asset management features at accessible prices. ReFlex uprights are where cutting edge power savings and modern, app-based food safety solutions meet rock-solid SKOPE design principles.



ReFlex



RF7.UPR.1.SD (Fridge)
RF7.UPF.1.SD (Freezer)




RF7.UPR.2.SD (Fridge)
RF7.UPF.2.SD (Freezer)



RF8.UPC.2.SD (Combo)

Standard finish: 304 Stainless Steel*

Standard Models: 1 solid door fridge or freezer, 2 solid doors fridge or freezer or combo



Restaurants / Cafés



Quick Service Restaurants



Clubs / Pubs / Bars



Hospitality Venues



Accommodation



Medical / Aged Care



Schools

Quick Guide

- ✓ Premium build quality
- ✓ Monitor and control with the free SKOPE-connect™ app
- ✓ Very good energy efficiency
- ✓ Operates in 40°C ambient
- ✓ R290 Natural Refrigerant with minimal environmental impact**
- ✓ Premium quality 304 stainless steel outer and inner*
- ✓ Easy-to-service refrigeration cartridge system
- ✓ Fridge or freezer or combo models available
- ✓ Award winning series

Standard Features

Benefits

Fan forced ducted airflow	Consistent temperature for food safety
Door activated interior LED lighting	Easy to find stored products
Key locks on all doors	Extra security
5 levels of adjustable & removable tray slides	For maximum product storage flexibility
Coved floors & premium grade stainless steel	Very durable and easy to clean
90° Stay-open door function	For product reloading convenience
Heated fascia	Eliminates condensation
Self closing, self sealing doors	Convenient, reliable closure
Easy grip handle design	Comfortable and convenient access
Supplied with lockable front castors, non-locking rear castors (135mm) and a set of adjustable legs (120-160mm)	For easy installation, positioning & relocation


Options

Notes

- 1 year extended warranty

*430 Stainless Steel used in some small functional areas of the cabinet.

** 2 door Freezer RF7.UPF.2.SD R404A



ReFlex™ Series

Upright

Cabinet

Solid Doors	Stainless Steel, self closing, lockable, swing
Shelves	Grey Plastic Coated Wire
Breathes from/Expels to	Top and Front/Top and Front
External & Internal	304 AISI Stainless Steel
Coved Floor	Yes
Worktop	N/A

Performance

Temperature Range	M1 Fridge: -1 to 4°C (adjustable with SKOPE-connect -2 to 10°C) L1 Freezer: less than -18°C (adjustable with SKOPE-connect -26 to -12°C)
Climate Class	5 (Heavy Duty) 40°C / 40%RH (RF7.UPF.2SD 4 (Standard Duty) 30°C / 55%RH)
Maximum Ambient Temperature	40°C




Refrigeration

Controller	Electronic with SKOPE- connect™
Connectivity	Via Bluetooth
System	Top Mount, Removable, Self Contained
Refrigerant	R290 Natural Refrigerant (2 door freezer is R404a)
Drainage	No plumbing required

Electrical

Power Supply	220-240 Volts a.c 50 Hz single phase supply
Plug	10 Amp 3 pin & 2.3m cable (1 door models) or 2.9m (2 door models) where applicable cabinets are supplied with correct regional plug types

Specifications

	Model ID	Fridge/Freezer	Doors	Door Type	Door Hinge	External Dimensions (W x D x H* mm)	Adjustable Shelves (No.)	Adjustable Shelves Size (W x D mm)	Interior Lighting**	Total Floor Area (m2)	Weight (kg)	Gross Internal Volume (litres)	Refrigerant / Charge	Current Draw (Amps)	Nominal Capacity (Watts)
	RF7.UPR.1.SD	Fridge	1	Solid	RH	680 x 760 x 1985	5	540 x 530	1	0.52	115	470	R290 / 70g	2.0	450
	RF7.UPF.1.SD	Freezer	1	Solid	RH	680 x 760 x 1985	5	540 x 530	1	0.52	122	470	R290 / 94g	4.0	550
	RF7.UPR.2.SD	Fridge	2	Solid	LH/RH	1220 x 760 x 1985	10	530 x 530	2	0.93	159	920	R290 / 90g	2.0	650
	RF7.UPF.2.SD	Freezer	2	Solid	LH/RH	1220 x 760 x 1985	10	530 x 530	2	0.93	171	920	R404A / 440g	4.0	600
	RF8.UPC.2.SD	Fridge/Freezer	2	Solid	LH/RH	1400 x 820 x 2035	10	530 x 595	2	1.15	227	513 (x2)	R290 / 70g / 94g	6.0	450/550

* 1 & 2 door cabinet height with fitted castors: 1985mm. Cabinet height variation with supplied adjustable legs: 1995 - 2035mm. Cabinet height with no castors or legs: 1850mm.


Combo height with fitted castors: 2035mm. Cabinet height variation with supplied adjustable legs: 2045 - 2085mm. Cabinet height with no castors or legs: 1915mm.

Before installing these cabinets please refer to the models specification sheet for dimensional tolerances and ventilation requirements

For full product technical and specification information always refer to the models specification sheet; download at skope.com

** Door Activated Interior Lighting

Upright: 1200mm 12W LED

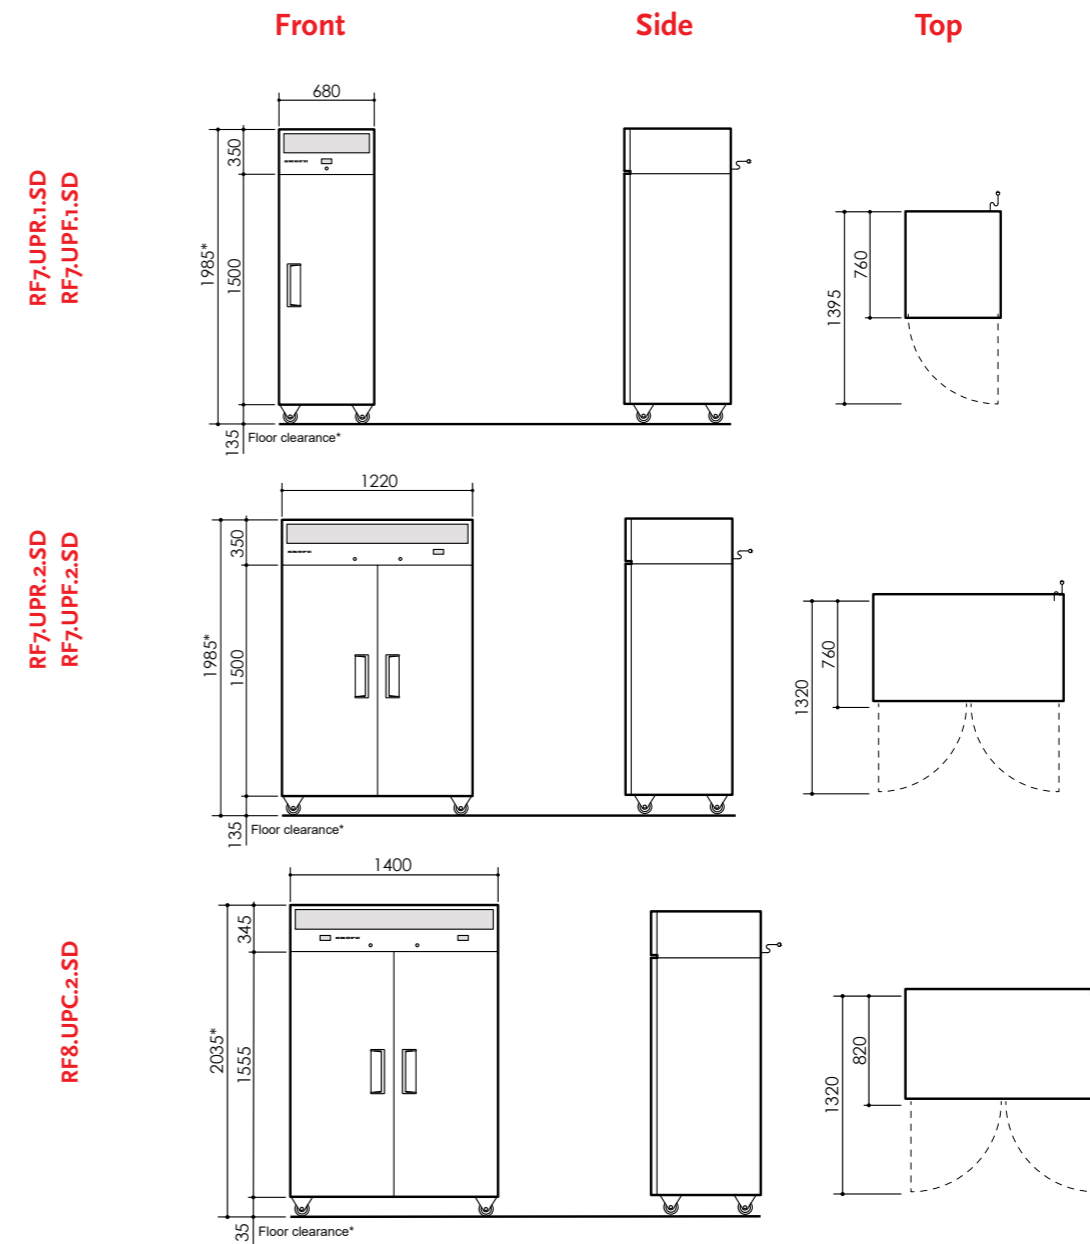

The new mark
of a professional



ActiveCore™ removable cartridge technology



2/1 Gastronorm sized stainless steel shelving



Premium badging & flat designer grille



Extra thick 80mm foam body with recessed door handles



90 deg stay-open door function & key barrel locks

ProSpec

You need to think outside the box to create culinary excellence.
So why choose cold storage that boxes you in?

Choose market-leading configuration options designed for chefs. Choose professional-grade quality refrigeration and smart technology. Choose to make your mark.



SKOPE-connect™



R290 Natural Refrigerant



ActiveCore™ Technology



5 Year Warranty Protection

ProSpec™ Series Upright

Food Storage

Fridge
2/1 GN Sized

Designed for professionals, the ProSpec Series is our best available cold storage solution with all our latest innovations combined with optimal power savings delivered through our ActiveCore™ R290 green refrigeration technology.



ProSpec




PG21.UPR.1.SD



PG21.UPR.2.SD

Standard finish: 304 Stainless Steel*
Standard Models: 1 & 2 solid door fridge



Restaurants / Cafés



Quick Service Restaurants



Clubs / Pubs / Bars



Hospitality Venues



Accommodation



Medical / Aged Care



Schools

Quick Guide

- ✓ ActiveCore technology
- ✓ Professional specification
- ✓ Designer styling for a seamless, minimalist look
- ✓ Operates in 40°C ambient
- ✓ Exceptional energy efficiency
- ✓ Monitor and control with the free SKOPE-connect™ app
- ✓ Quiet operation
- ✓ R290 Natural Refrigerant with minimal environmental impact
- ✓ 5 Years full warranty (parts & labour)
- ✓ Gastronorm sized

Standard Features

Benefits

Premium grade stainless steel throughout	Long life durability
Designer look with a seamless external finish	Premium appearance with easy to clean surfaces
Fan forced ducted airflow	Maintain a consistent temperature for food safety
Extra thick 80mm foam body	Maximum strength, durability insulation and energy savings
Door activated interior LED lighting	Easy to find stored products
Coved interior floors	Very durable and easy to clean
90° stay-open door function	For product reloading convenience
Key barrel locks on all doors	Extra security

Options

Notes

- Reversible Door Hinge Kit

*430 Stainless Steel used in some small functional areas of the cabinet.

In development

Additional models
Comprehensive options & upgrades

Technical Information

Refer Product Specification Sheets at skope.com



ProSpec™ Series

Upright

Cabinet

Solid Doors	Stainless Steel, self closing, lockable, swing
Shelves	Stainless Steel GN2/1 on stainless steel tray slides.
Breathes from/Expels to	Top and Front/Top and Front
External & Internal	304 AISI Stainless Steel
Coved Floor	Yes
Worktop	N/A

Performance


Temperature Range	M1 Fridge: 1 to 4°C (adjustable with SKOPE-connect 1 to 15°C)
Climate Class	5 (Heavy Duty) 40°C / 40%RH
Maximum Ambient Temperature	40°C

Refrigeration



Controller	Electronic with SKOPE- connect™
Connectivity	Via Bluetooth
System	ActiveCore Removeable Cartridge Top Mount, Self Contained
Refrigerant	R290 Natural Refrigerant
Drainage	No plumbing required

Electrical

Power Supply	220-240 Volts a.c 50 Hz single phase supply
Plug	10 Amp 3 pin & 2.6m cable where applicable cabinets are supplied with correct regional plug types

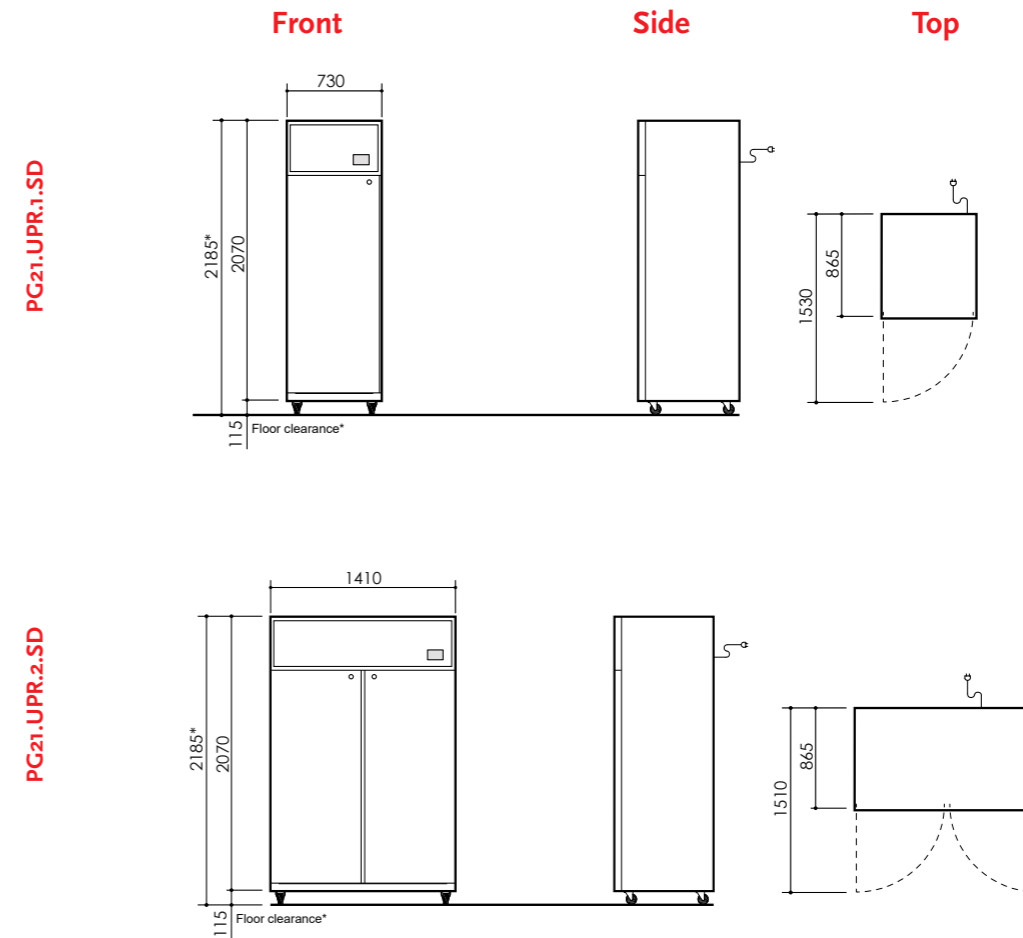

Specifications

	Model ID	Fridge/Freezer	Doors	Door Type	Door Hinge	External Dimensions (W x D x H* mm)	Adjustable Shelves (No.)	Adjustable Shelves Size (W x D mm)	Interior Lighting**	Total Floor Area (m ²)	Weight (kg)	Gross Internal Volume (litres)	Refrigerant / Charge	Current Draw (Amps)	Nominal Capacity (Watts)
	PG21.UPR.1.SD	Fridge	1	Solid	RH	730 x 865 x 2185	5	GN 2/1 - 530 x 650	1	0.63	150	572	R290/99g	3.0	740
	PG21.UPR.2.SD	Fridge	2	Solid	LH/RH	1410 x 865 x 2185	10	GN 2/1 - 530 x 650	2	1.21	230	1266	R290/99g	3.0	740

* Cabinet height with fitted castors; (2185-2200mm): with optional height adjustable legs (2220- 2250mm): No Castors (2070mm)
 Before installing these cabinets- please refer to the models specification sheet for dimensional tolerances and ventilation requirements
 **Door activated interior lighting 1400mm, 16W LED
 For full product technical and specification information- always refer to the models specification sheet; download at www.skope.com

SKOPE Funding

Enjoy Peace of Mind with a Tailored Ownership Plan

Own Me - Ownership Plan

- ✓ Free up cashflow
- ✓ Extend your warranty protection
- ✓ Annual planned maintenance included
- ✓ Flexible term, choice of 1, 2, 3, 4 or 5 years
- ✓ Affordable monthly payments
- ✓ No end of term balloon or residual payment
- ✓ Ownership at end of term
- ✓ Load your balance sheet and claim depreciation, and GST

Quick & Easy Application



Apply Now Online

skope.com/funding



By Phone

AUS 1800 121 535 (opt 4)
NZ 0800 947 5673 (opt 4)



By Email

skopefunding@skope.com

Head Office

New Zealand
SKOPE Industries Limited
57 Princess Street
PO Box 1091
Christchurch 8140
New Zealand
International Tel: +64 (3) 983 3800

Customer Services

Australia
Freephone: 1800 121 535
Email: skope@skope.com

New Zealand
Freephone: 0800 947 5673
Email: skope@skope.com