

XV 10AMP

Undercounter Dishwasher

STARLINE




by **WASHTECH**



STANDARD FEATURES

- 1 and 2 minute cycles
- Washtech hybrid controls
- Dual chemical pumps
- Hands-free auto drain with drain pump
- Compatible with 435mm to 450mm racks
- 310mm clearance
- 0.5HP wash pump
- Heavy-duty stainless steel construction
- Lower stainless steel wash and drain filter basket

- 1x 450mm dish rack (600 70081)
- 1x 450mm cup rack (600 70080)
- 1x cutlery container (C660503)

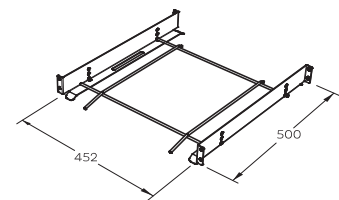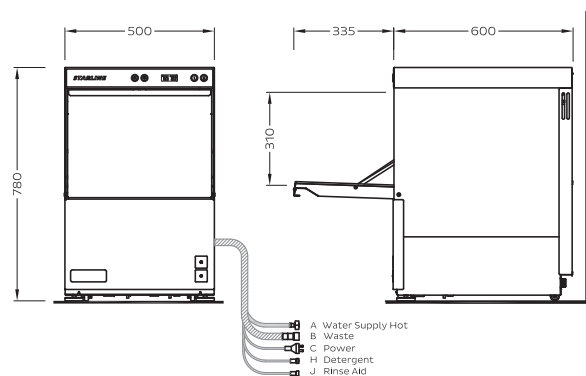

SPECIFICATIONS

A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-350kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.2L per cycle*

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

V	Hz	A/ph	Max kW
Single phase	240	50	10

Dimensions

Width (mm)	500	Machine	Packed
Depth (mm)	600		
Height (mm)	780		
Weight (kg)	47		
Volume (m3)			0.33

Water Quality

	Min	Max
pH	7	8
Hardness	20	100
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Water consumption rates may vary based on site conditions. Isolating switch must be within 1m of, and not directly behind, the machine. Refer to operator manual for installation instructions.

This unit is fitted with special elements enabling operation on a 1p/10A power supply. It cannot be upgraded to 1p/15A.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.