



VM404 Moulder

W 635mm x D 950mm x H 1610mm

Product Features

- Light beam safety guard
- Four piece fitted as standard
- Fitted with Derpranyl belt
- Standard with green start and red stop buttons
- Easy setting selection
- Small footprint
- Supplied on castors



VM404


miracle

VM404 Moulder

Stainless Steel Curling

Start & Stop Buttons

Emergency Stop Button

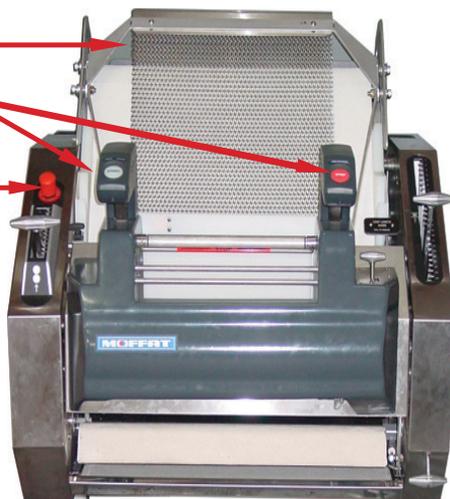

Machine Range/Output

- Maximum moulding width 300mm
- Recommended weight range 30 - 1200 grams

Overall Construction

- Galvanised steel main body, stainless steel finish
- Sheeting rollers non stick PVC material
- Fibreglass mouldings
- Curling chain stainless steel construction (removable for cleaning)

Operation

- Four piecing blades activated by front lever
- Fixed loaf guides
- Fully adjustable sheeting roller settings (front mounted)
- Operation & emergency stop buttons

Dimensions

Width: 635mm

Depth: 950mm

Height: 1610mm

Nett weight: 300kg

Electrical Requirements

400-415V, 3P+N+E, 50Hz, 1.0kW

4 pin 10 amp plug supplied

Additional Technical Information

Power outlet to be located a minimum of 1.5m off the floor

MOFFAT

Australia
www.moffat.com.au
New Zealand
www.moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited

Christchurch
16 Osborne Street
Christchurch 8011
Telephone 03-389 1007
Facsimile 03-389 1276
sales@moffat.co.nz

Auckland
Telephone 09-574 3150
sales@moffat.co.nz

