

specifications

SC430N


serene

from SKOPE

Bottom Mount, 1 Door (Glass), Upright Fridge

Project: _____

Item No: _____

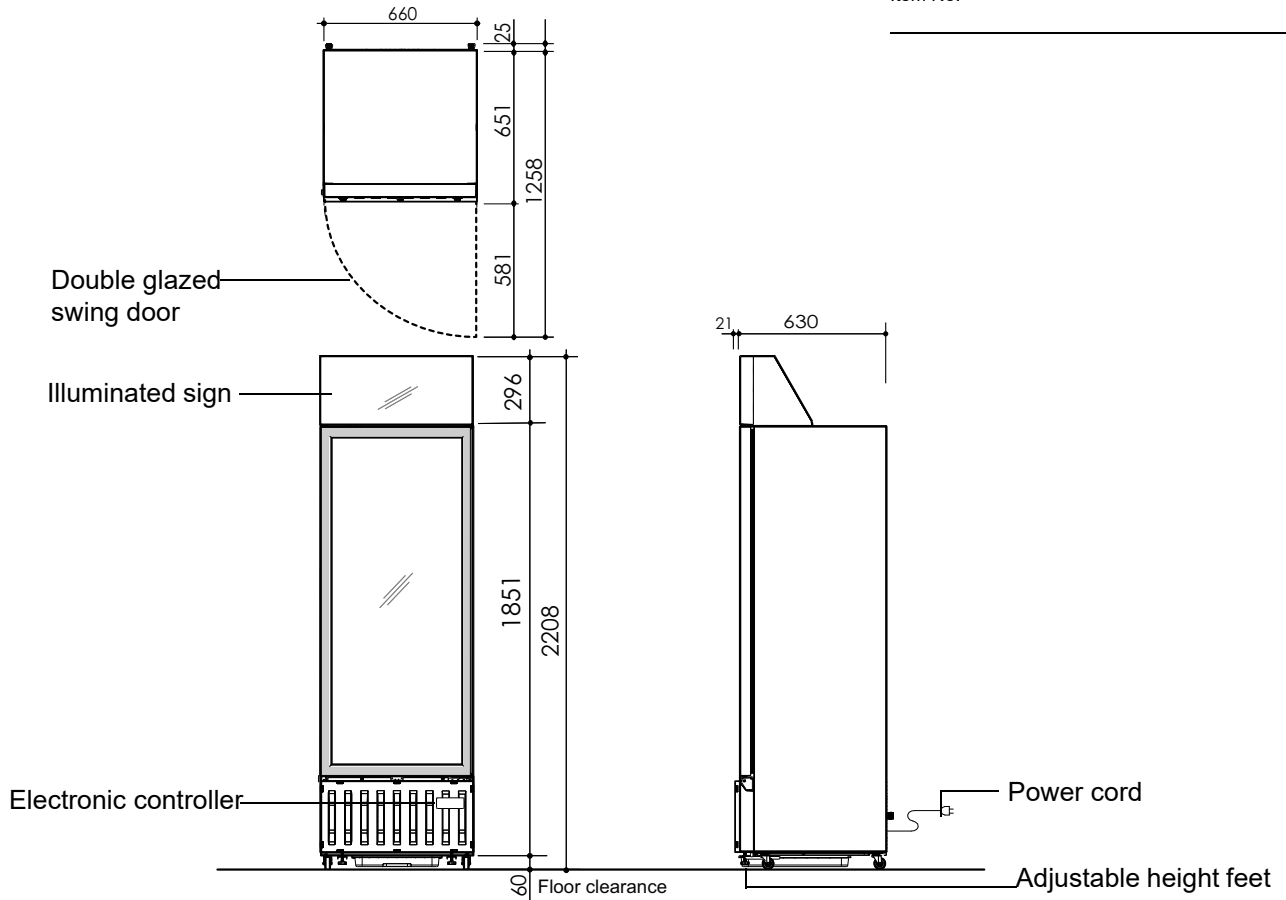

CABINET	
Doors	1 × self-closing, double glazed, Argon filled, toughened safety glass swing doors (hinged RH)
Internal door opening	1 × door opening: 1505mm high × 655mm wide
Shelves	5 × adjustable height, full width wire shelves: 560mm wide × 410mm deep
Sign	Illuminated sign
Material	Powder-coat galvanized steel
PERFORMANCE	
Max. ambient temp.	35°C
Temperature range	0 °C to 5 °C
Noise measurement	65 dB (A)
GEMS rating class	M1
GEMS energy consumption	2.74 kWh/24h
GEMS annual running cost	\$300 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5
Interior lighting	1×7W switched LED strip lighting
Sign lighting	1×11W switched LED strip lighting
Power cord	Supplied with 1.7m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.3 Amps
REFRIGERATION	
Controller	Electronic controller with digital temperature display
Refrigeration system	Bottom mounted split refrigeration system
Refrigerant	R290 / 45g (natural refrigerant)
Nominal capacity	320 Watts
Heat rejection (Avg/peak)	115 Watts/140 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	2208mm*	1430mm
Width	660mm	570mm
Depth	630mm	525mm
Floor area	0.429m ²	
Weight	112kg	
Gross volume	420 litres	

*Height 2208mm includes castors.

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	Not required
Sides	Not required
Back	100mm
Bottom	Not required

SKOPE INDUSTRIES LIMITED

Australian Free phone: 1800 121 535, New Zealand Free phone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0685 Rev. 1.0 Jan. 2021

