

WS3

Undercounter Washer/Sanitiser
W 575mm x D 600mm x H 845mm

The WS3 is a durable, simple-to-use and easy-to-maintain washer/sanitiser designed specifically for use with bedpans and other associated equipment.

The WS3 features Washtech's hybrid control system – combining IP67 stainless steel switches with tried-and-tested mechanical switchgear and a customisable electronic timer – which ensures long term durability and reliability. The WS3 is supplied with a heavy-duty stainless steel rack customised for bedpans and includes a detergent level sensor with warning light and prime switch.

Since 1981, Washtech dishwashers have been designed and manufactured in New Zealand to meet the unique local conditions and regulations. Being New Zealand based means that Washtech dishwashers are backed by the most extensive service network and parts availability in New Zealand.

Special Features

- Customised 3 and 4 minute cycles including an initial cold pre-rinse, an extended wash cycle that fully flushes the tank and an extended rinse cycle to ensure sufficient sanitisation
- Heavy-duty stainless steel bedpan rack for efficient washing of up to 4 bedpans plus additional items each cycle
- Detergent level sensor with warning light and prime switch

Standard Features

- Washtech hybrid controls
- Easy installation including:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - Drain pump with outlet hose
- Robust stainless steel wash/rinse arms with precision stainless steel jets
- Heavy-duty stainless steel scrap trays
- Water consumption of 11.5 litres per cycle

Includes:

- 1x stainless steel bedpan rack (220 10026)
- 1x 500mm cup rack (600 70029)
- 1x cutlery container (C660503)



WS3

washtech.co.nz

Washtech Limited

PO Box 90-548
Auckland 1142

414 Rosebank Road
Avondale
Auckland 1026
NEW ZEALAND

(09) 829 0930
info@washtech.co.nz




service@washtech.co.nz

For 24/7 service and support:
0800 WASHTECH

Washtech provides full service and support 24 hours a day, 7 days a week, with a comprehensive nationwide network of authorised service providers.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© 2021 Washtech Limited
Version 2109

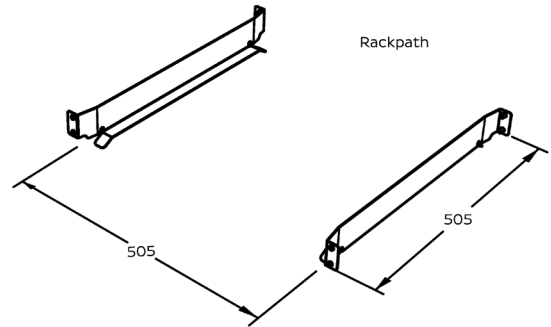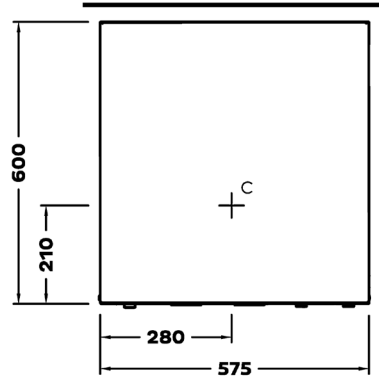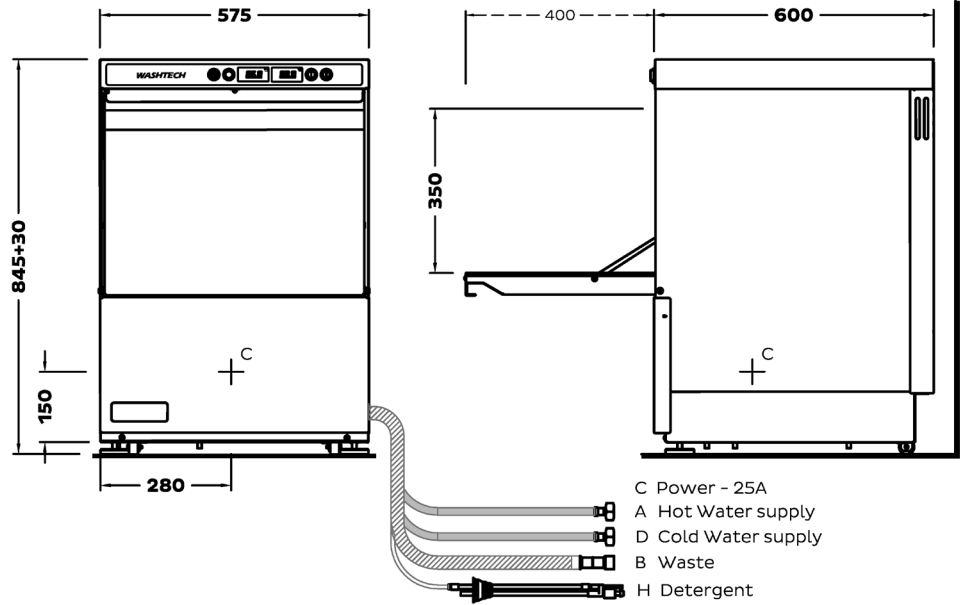

A - Hot Water

Temperature 65°C
Connection 3/4" male; hose supplied
Pressure 200-350kPa
Flow 20 litres per min
Quality Potable - refer table
Backflow Prevention AVB
Consumption 11.0 litres per cycle*

D - Cold Water

Temperature <25°C
Connection 3/4" male; hose supplied
Pressure 200-350kPa
Flow 20 litres per min
Quality Potable - refer table
Backflow Prevention AVB
Consumption 0.5 litres per cycle

B - Waste

Connection Hose supplied for 38mm open standpipe 750mm high or connection to sink trap

C - Electrical V Hz A/phase Max kW
Single Phase 230 50 25 6.37

Dimensions

	Machine	Packed
Width (mm)	575	720
Depth (mm)	600	690
Height (mm)	845	970
Weight (kg)	75	78
Volume (m ³)		0.48

Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl ⁻		100
SO ₄		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl ₂		0.1

* Water consumption rates may vary based on site conditions.

Refer to operator manual for installation instructions.

Isolating switch must be within 1m of, and not directly behind the machine.