

Convotherm maxx pro easyTouch Combi Steamer

CXEST6.20D ELECTRIC DIRECT STEAM 14 x 1/1 GN or 7 x 2/1 GN

- Direct steam system
- Natural Smart Climate™ (ACS+) cooking methods: Steam, Combi-steam, Convection
- Natural Smart Climate™ extra functions:
 - Crisp&Tasty - 5 moisture removal settings
 - BakePro - 5 levels of traditional baking
 - HumidityPro - 5 humidity settings
 - Controllable fan - 5 speed settings
- easyTouch 10" TFT HiRes glass touch display (capacitive)
- ConvoClean+ fully automatic cleaning system with eco, regular and express modes, including optional single-dose dispensing
- HygieniCare
- WiFi and Ethernet interface (LAN)
- USB port integrated in the control panel
- Steam generated by injecting water into the oven chamber
- LED lighting in oven cavity
- Triple glass appliance door
- Right-hinged appliance door
- Disappearing door



Standard Features

- Cooking methods:
 - Steam (30-130°C) with guaranteed steam saturation
 - Combi-steam (30-250 °C) with automatic moisture control
 - Convection (30-250 °C) with optimised heat transfer
- Operation of easyTouch user interface:
 - 10" TFT HiRes glass touch display (capacitive)
 - Smooth-action, quick reacting scrolling function
- Climate Management
 - Natural Smart Climate™ (ACS+), HumidityPro, Crisp&Tasty
- Quality Management
 - Airflow Management, BakePro, Multi-point core temperature probe
 - Preheat and cool down function
- Production Management
 - Automatic cooking with Press&Go with up to 399 cooking profiles
 - Integrated cookbook with 7 different categories
 - TrayTimer – load management for different products at the same time (manual mode)
 - TrayView – load management for automatic cooking of different products using Press&Go
 - Favourites management
 - HACCP data storage
 - USB port
 - ecoCooking – energy-save function
 - LT cooking (low temperature cooking) / Delta-T cooking
 - Cook&Hold – cook and hold in one process
 - Autostart
 - Regenerate+ - flexible multi-mode rethermalisation function with preselect
- Cleaning Management:
 - ConvoClean+ - fully automatic cleaning system

- Quick access to individually created and saved cleaning profiles
- Cleaning scheduler
- FilterCare interface
- HygieniCare: safety by antibacterial surfaces
 - Hygienic Steam Function
 - Hygienic Handles
 - SteamDisinfect
- Door handle with safety latch and sure-shut function
- Adjustable appliance feet, from 100 mm to 125 mm
- Integrated recoil hand shower

Options

- ConvoSmoke – built in food-smoking function (HotSmoke)
- Steam and vapour removal (built-in condensation hood)
- Sous-vide sensor, with external socket
- Core temperature sensor, with external socket
- Marine model
- Available in various voltages


Accessories

- Stainless steel stand
- Stacking kit
- ConvoLink – HACCP and cooking profile management PC software
- ConvoVent 4 condensation hood with grease filter
- ConvoVent 4+ condensation hood with grease and odour filter
- Banquet system package: plate rack, mobile shelf rack, transport trolley, thermal cover (individual items are available)
- Care products for ConvoClean+ fully automatic cleaning system (multiple and single-dose dispensing)


Convotherm maxx pro easyTouch Combi Steamer

CXEST6.20D ELECTRIC DIRECT STEAM 14 x 1/1 GN or 7 x 2/1 GN


Front view

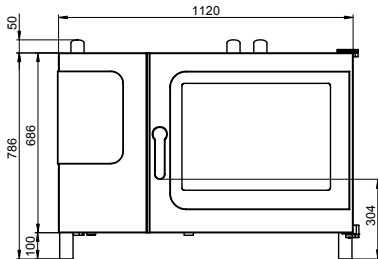

View from above with wall clearances

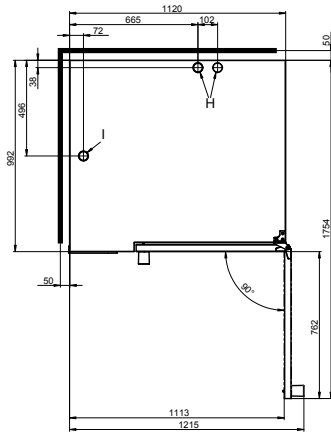

Connection points

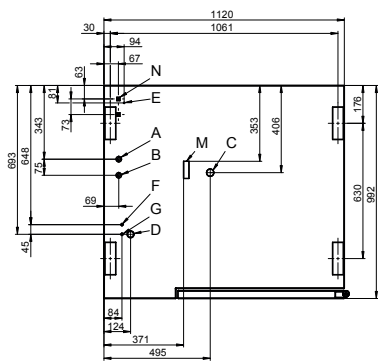

- A Water connection (for water injection)
- B Water connection (for cleaning, recoil hand shower)
- C Drain connection DN 50
- D Electrical connection
- E Equipotential bonding
- F Rinse-aid connection
- G Cleaning-agent connection
- H Air vent Ø 50 mm
- I Dry air intake Ø 50 mm
- M Safety overflow 80 x 25 mm
- N RJ45 Ethernet port

DIMENSIONS

| | |
|--------|---------|
| Width | 1211 mm |
| Depth | 992 mm |
| Height | 786 mm |
| Weight | 153kg |

PACKED DIMENSIONS

| | |
|------------------------------------|---------|
| Width | 1345 mm |
| Depth | 1140 mm |
| Height | 1025 mm |
| Weight (including cleaning system) | 188 kg |

Safety clearances*

| | |
|---|--------|
| Rear | 50 mm |
| Right | 50 mm |
| Left (larger recommended for servicing) | 50 mm |
| Top (for ventilation) | 500 mm |

*Heat sources must lie at a minimum distance of 500 mm from the appliance.

INSTALLATION REQUIREMENTS

For precise installation instructions please refer to the units installation manual

LOADING CAPACITY

| | |
|--|-------|
| Max. number of food containers | |
| Shelf distance | 68mm |
| GN 1/1 (with standard rack) | 14 |
| GN 2/1 (with standard rack) | 7 |
| 600 x 400 baking sheet (with appropriate rack) | 10 |
| Max. loading weight GN 1/1 / 600 x 400 | |
| Per combi steamer | 60 kg |
| Per shelf | 15 kg |

ELECTRICAL SUPPLY

| | |
|--|---------|
| 3N~ 400V 50/60Hz (3P+N+E) | |
| Rated power consumption | 19,5 kW |
| Rated current | 28.1 A |
| Fuse | 32 A |
| RCD (GFCI), frequency converter | Type A |
| (singlephase) (recommended), type B/F (optional) | |
| Special voltage options available on request. | |
| Connection to an energy optimisation system as standard. | |

WATER CONNECTION

Water supply

| | |
|--|---|
| 2 x G 3/4" permanent connection, optionally including connecting pipe (min. DN13 / 1/2") | |
| Flow pressure | 150 - 600 kPa (1.5 - 6 bar) |
| Appliance drain | |
| Drain version | Permanent connection (recommended) or funnel waste trap |
| Type | DN50 (min. internal Ø: 46 mm) |
| Slope for waste-water pipe | min. 3.5% (2°) |

WATER QUALITY

Drinking water

(install water treatment system if necessary)
 Treated tap water for water injection
 Untreated tap water for cleaning, recoil hand shower

Total hardness

| | |
|-------------------------|--|
| Injection (soft water) | 4-7 °dh / 70-125 ppm / 7-13°TH / 5-9 °e |
| Cleaning, recoil shower | 4-20 °dh / 70 - 360 ppm / 7 - 35°TH / 5 - 25°e |

Properties

| | |
|--|---------------|
| pH | 6.5 - 8.5 |
| Cl- (chloride) | max. 60 mg/l |
| Cl ₂ (free chlorine) | max. 0.2 mg/l |
| SO ₄ ²⁻ (sulphate) | max. 150 mg/l |
| Fe (iron) | max. 0.1 mg/l |
| Temperature | max. 40°C |
| Electrical conductivity | min. 20 µS/cm |

EMISSIONS

Heat output

| | |
|---------------|---------------------|
| Latent heat | 3200 kJ/h / 0.89 kW |
| Sensible heat | 4200 kJ/h / 1.17 kW |

Waste water temperature

| |
|------------|
| max. 80 °C |
|------------|

Noise during operation

| |
|-------------|
| max. 70 dBA |
|-------------|

STACKING KIT

| | |
|----------------------------------|------------------------------|
| Permitted combinations | 6.20 on 6.20 / 6.20 on 10.20 |
| (Electric on electric appliance) | |



moffat.com.au
 moffat.co.nz

Australia
 moffat.com.au

Moffat Pty Limited

Victoria/Tasmania
 740 Springvale Road
 Mulgrave, Victoria 3170
 Telephone +61 3-9518 3888
 Facsimile +61 3-9518 3833
 vsales@moffat.com.au

New South Wales
 Telephone +61 2-8833 4111
 nswsales@moffat.com.au

South Australia
 Telephone +61 3-9518 3888
 vsales@moffat.com.au

Queensland /
 Northern Territory
 Telephone +61 7-3630 8600
 qldsales@moffat.com.au

Western Australia
 Telephone +61 8-9413 2400
 wasales@moffat.com.au

New Zealand
 moffat.co.nz

Moffat Limited

Rolleston
 45 Illinois Drive
 Izone Business Hub
 Rolleston 7675
 Telephone +64 3-983 6600
 Facsimile +64 3-983 6660
 sales@moffat.co.nz

Auckland
 Telephone +64 9-574 3150
 sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
 AN.CON.S.2101

