

# XG

Undercounter Glasswasher

# STARLINE


by **WASHTECH**



### STANDARD FEATURES

- 60 second glasswashing cycle
- Washtech hybrid controls
- Hands-free auto-drain
- Dual chemical pumps
- Drain pump
- Stainless steel wash and drain filter

1x 435mm glassrack (K0404)

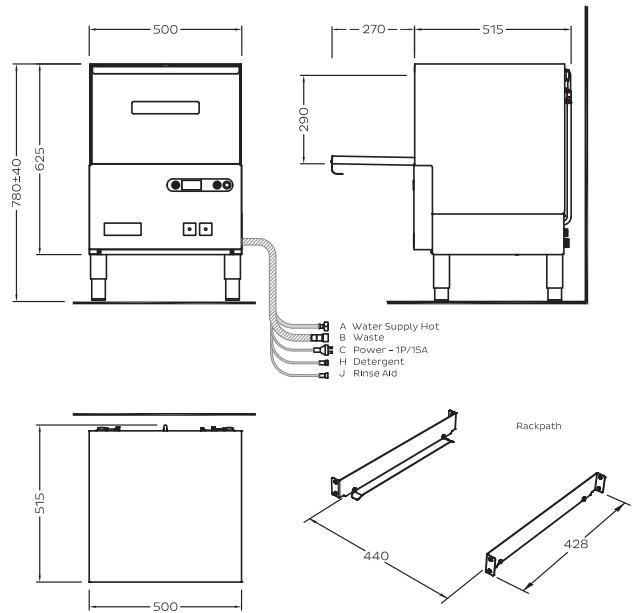

### SPECIFICATIONS

#### A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-350kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	1.5L per cycle*

#### D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

#### C - Electrical

Single phase	V	Hz	A/ph	Max kW
	240	50	15	3.15

#### Dimensions

Width (mm)	Machine	Packed
Depth (mm)	500	520
Height (mm)	515	610
Weight (kg)	780**	835
Volume (m3)	33	52
		0.3

#### Water Quality

	Min	Max
pH	7	8
Hardness	20	100
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

\*Water consumption rates may vary based on site conditions  
Isolating switch must be within 1m of, and not directly behind, the machine  
Refer to operator manual for installation instructions

\*\*Suitable for plinth installation with optional feet (min height is 635mm)

In line with policy to continually develop and improve its products,  
Washtech reserves the right to change specifications and design without  
notice.