


Version 2018-21

ScanBox

Bringing your food with care

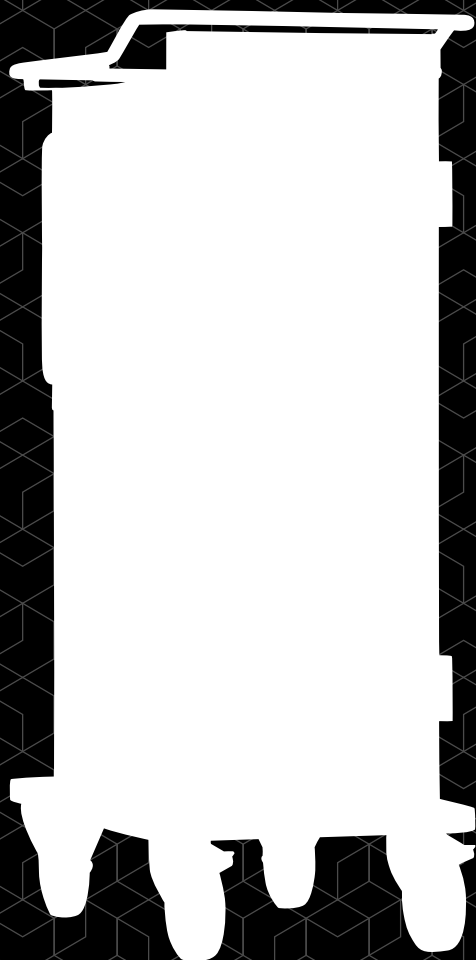

User Manual

Ergo Line | Banquet Line | Banquet Master | Under Counter

Ambient | Hot | Active Cooling



Engelska / English

This user manual is translated from Swedish to English.



**CAUTION: READ THE USER MANUAL
BEFORE USING THE PRODUCT**



Read Operator's Manual



May not be put in household waste




CAUTION

Congratulations...

...on your selection of a new ScanBox banqueting cart. We are pleased that you have chosen one of our products and we hope that you will enjoy our equipment for years to come.

Safety Instructions



This manual should be read before using the product. The manufacturer can not be held liable for personal injury or any other damage caused by improper use of the product. For future use, always keep the user manual together with the product.

Safety for children and disabled

This product can be used by children from 8 years of age and upwards; and by persons with impaired physical, sensory or mental ability; as well as persons with insufficient experience and knowledge, if they are supervised or instructed as to how the product can be used safely and understands risks associated with the use.

Keep all packaging materials out of reach of children due to asphyxiation.

Do not allow children to play with the product.

General Safety Instructions

The product is intended for professional temporary storage and distribution of food, up to eight hours. It is not allowed to use the

product for other purposes.

The box must stand flat with castors in a locked position before it is connected to electric mains.

For products with active cooling to function optimally, the box must be placed at least thirty centimeters from the wall.

This product must be connected to the electric mains through a socket with a secure connection to the ground.

When unplugging the box from the wall socket, grab the plug handle and pull it out. Do not pull the plug from the wall socket by grabbing the power cord.

The product must be disconnected from the electric mains before troubleshooting or maintenance.

Replacement of the spiral cable and plug must only be carried out by the manufacturer, its service agent or by personnel with equivalent knowledge, to avoid danger.

Parts of the product will become hot when using the product. Avoid touching these hot parts.

Do not store flammable or explosive substances such as flammable liquids inside the product.

If necessary, check that ventilation openings are not blocked.

Think about the risk of the product tipping over. Load pans from bottom to top, unload pans from top to bottom. Load heavy pans underneath. Avoid placing or transporting the product on sloping surfaces.

Follow the instructions for cleaning and maintenance as you will find further in this manual.

Do not use pressure washer to clean the product.

If your product is equipped with a humidifier, it has to be filled with fresh water before heating up the unit.

Banquet Master is equipped with a holder for the roll-in rack handle on the outside of the box. Place it here when the box is hot. Please be aware, handle of roll-in rack might be hot.

Table of Content

Congratulations.....	3
Safety Instructions	3
Safety for children and disabled	3
General Safety Instructions	3
Table of Content	5
Advice	6
Maintenance & Cleaning	6
General Information Before Cleaning	6
Cleaning of Runners.....	6
Cleaning of Pan Stop	6
Cleaning of Plastic Parts	6
Cleaning of Castors	6
Cleaning of Anodized Aluminum Surfaces	7
General	7
Cleaning Methods.....	7
Detergents.....	7
Fixed Waste.....	7
Scratches.....	7
Cleaning of Stainless Steel Surfaces	7
General	7
Detergent.....	8
Cleaning of Fans.....	8
General	8
Cleaning Method.....	8
If your box does not work.....	8
Environmental protection	8
Packaging	9
Warranty	9
The warranty does not Apply if:.....	9
The following parts are not covered by the warranty:	9
Manufacturer's Address.....	9
Ergo Line & Banquet Line Active Cooling	10
Product Description	10
Overview	10
Control Panel.....	11
Before using the product for the first time	11
Transport	11
Unpacking	12
Recycling of Packaging Materials	12
First Cleaning	12
Commissioning	12
Daily Use	12
Declaration of Conformity with CE	12
Chart – Technical Data.....	13
Ergo Line, Banquet Line, Banquet Master & Under Counter Hot	14
Product Description	14
Overview	14
Control Panel.....	15
Before using the product for the first time	15
Transport	15
Unpacking	16
Recycling of Packaging Materials	16
First Cleaning	16
Commissioning	16
Daily Use	16
Declaration of Conformity with CE	16
Chart – Technical Data.....	17

Advice

- ScanBox recommends users to put sealed lids on G/N pans and other types of pans to reduce spillage and to make cleaning easier.
- **Note:** G/N pans or trays must meet the EN 631 standard.
- The door must always be closed during transport.
- Cleaning gradually removes lubricating oil. Therefore, the door lock & castors must be oiled regularly.
- If the boxes are cleaned every day, ScanBox recommends using stainless steel castors with sealed ball bearings.

Maintenance & Cleaning

The product must be cleaned and serviced regularly. Moving parts must be lubricated and tightened.

General Information Before Cleaning

- Disconnect the product from the electric mains by unplugging it from the wall socket.
- Make sure the product has cooled down to reduce the risk of burns on hands or arms.
- Have a certified electrician inspect the product every six months.
- **Note:** do NOT clean the product with a power washer.

Cleaning of Runners

- Remove detachable runners and clean them manually or place them in a dishwasher.
- Products with pressed runners should be cleaned manually from inside of the box.

Cleaning of Pan Stop

Some models have a removable pan stop located on the inside at the back of the product. The pan stop can be removed for cleaning by unhooking it from the keyhole mounts. Be sure to lock the castors before disassembling or mounting the product.

Cleaning of Fiberglass Plastic Parts

Clean plastic parts such as side panels, door panel, back panel, fiberglass plastic cases and door gasket with a mild detergent diluted with warm water. After cleaning, wipe the surfaces dry with a soft cloth.

Cleaning of Castors

Use the same procedure as “Cleaning of Fiberglass Plastic Parts” when cleaning the castors, but make sure that the lubricant of the castors does not leak out when cleaning.

Cleaning of Anodized Aluminum Surfaces

General

Anodized aluminum surfaces must be cleaned if food has been spilled and/or is stuck in order to keep the product hygienic. Cleaning must be completed before the product is reheated or cooled down. Avoid spillage, if possible. Clean spillage before it dries since dried spillage is harder to get rid of. Beware of the hot surfaces.

Cleaning Methods

Cleaning can be done with a hose nozzle or with squeegees and cloths. A bucket of hot water with soft cleaners and a brush is recommended. Rinse with low pressure water hose and wipe dry with a soft cloth.

Verify your products IP-classification on the CE mark placed on the side of the product. Information on how to interpret the IP-classification is available at <http://www.sp.se/en>.

The manual method allows the use of wax-based cleaners and polishing / wiping with a soft cloth. The thin wax layer reduces the risk of food spillage getting stuck on the surface thus prolonging time between cleaning.

Detergents

The anodized aluminum surfaces are sensitive to strong acids and, in particular, to strong alkalis, e.g. sodium hydroxide. Therefore, detergents with such content should NOT be used as they may cause stains and veins. Soft clean water in combination with a neutral detergent (pH 6-8) is recommended. The anodized surface is not sensitive to organic solvents why such can be used, e.g. mineral turpentine. Do not use aggressive detergents such as spray cleaners.

Fixed Waste

Dried food residue on the inside of the box can be scraped away with a plastic scraper. The surface can be polished with a sponge (3M) or equivalent.

Scratches

Scratches that have gone through the anodization and exposes the aluminum below is considered purely cosmetic damage. This is due to the excellent adhesion of the anodization and the built-in properties of the aluminum; however, these types of scratches pose a risk of further corrosion.

Scratches on the fiberglass plastic laminate on the outside of the box can be polished with gel coat, which will improve damages of mechanical surfaces and turn into a glassy surface. Larger damages such as holes and deep scratches in plastic laminate can be spackled with fiberglass putty and painted.

Please contact ScanBox Thermo Products AB at: +46 454-30 83 00 or info@scanbox.se if you have further questions.

Cleaning of Stainless Steel Surfaces

General

Stainless steel surfaces soiled with food residue must be cleaned to remain hygienic. Cleaning must be completed before each use or once a day. Avoid food spillage, if possible. Clean food residue before it dries to facilitate cleaning.

Beware of hot surfaces.

Detergent

- Use only detergents for stainless steel. Detergents may not contain chlorides.
- Contact your supplier of cleaners and detergents for recommendations regarding stainless steel detergents.

Stainless steel can begin to corrode and discolor after prolonged exposure to liquids containing salt.

Cleaning of Fans

General



CAUTION: Only qualified personnel may clean the fans.

The fans must be cleaned every three months, or if there is food stuck in the fan. After each transport, the fan should be inspected to determine if there is food stuck in the fan. If so, it must be cleaned before the box is started.

Cleaning Method

Before you start cleaning, the box must be disconnected from the wall socket. Remove the screws that hold the element cover. Start cleaning the fan from dust and other residues.

Compressed air, a brush or a wet cloth can be used to clean the fan and the cooling flanges.

Note: Do not use running water to clean the fan.


Note: The boxes should not be cleaned with a high pressure washer.

If your box does not work

Only approved spare parts from ScanBox may be used. Otherwise, the warranty will not apply. Only qualified personnel may perform repairs that affect the box's electrical system. This also applies to the change of spiral cord and plug.

Environmental protection



This symbol  on the product indicates that the product can not be handled as household waste. It should, instead, be submitted to a recycle station for electrical and electronic components. When ensuring that the product is handled correctly, you help prevent negative environmental effects. For further information, contact your local authorities, waste collection service or the retailer who sold the product to you.

Packaging

Our packaging material is environmentally friendly and recyclable. Sort and discard the material in suitable containers at the recycling station.

Warranty

All ScanBox products have a 12 month warranty from the date of the invoice. In case of complaints or warranty cases, a warranty form must be filled in. It is mandatory to fill in both the article number and serial number when submitting the warranty form. You can download the warranty form from ScanBox's website at <https://www.scanbox.se/en/support/warranty>. The warranty form should be sent to the company where you purchased your products or directly to ScanBox (only Swedish customers).

The warranty does not Apply if:

- You are not following the instructions in this manual.
- You use the product for other purposes than it is intended for.
- You change some settings in the control panel.
- You make functional changes to the product.
- You use non-original spare parts.

The following parts are not covered by the warranty:

- Spiral Cord
- Castors
- Rubber cladder on the chassis
- Doors Gasket

Manufacturer's Address

ScanBox Thermo Products AB



Ekängsvägen 1
293 40 Olofström
SWEDEN

+46 (0) 454 30 83 00
info@scanbox.se
www.scanbox.se

Ergo Line, Banquet Line & Bakery Line Active Cooling

Product Description

Overview

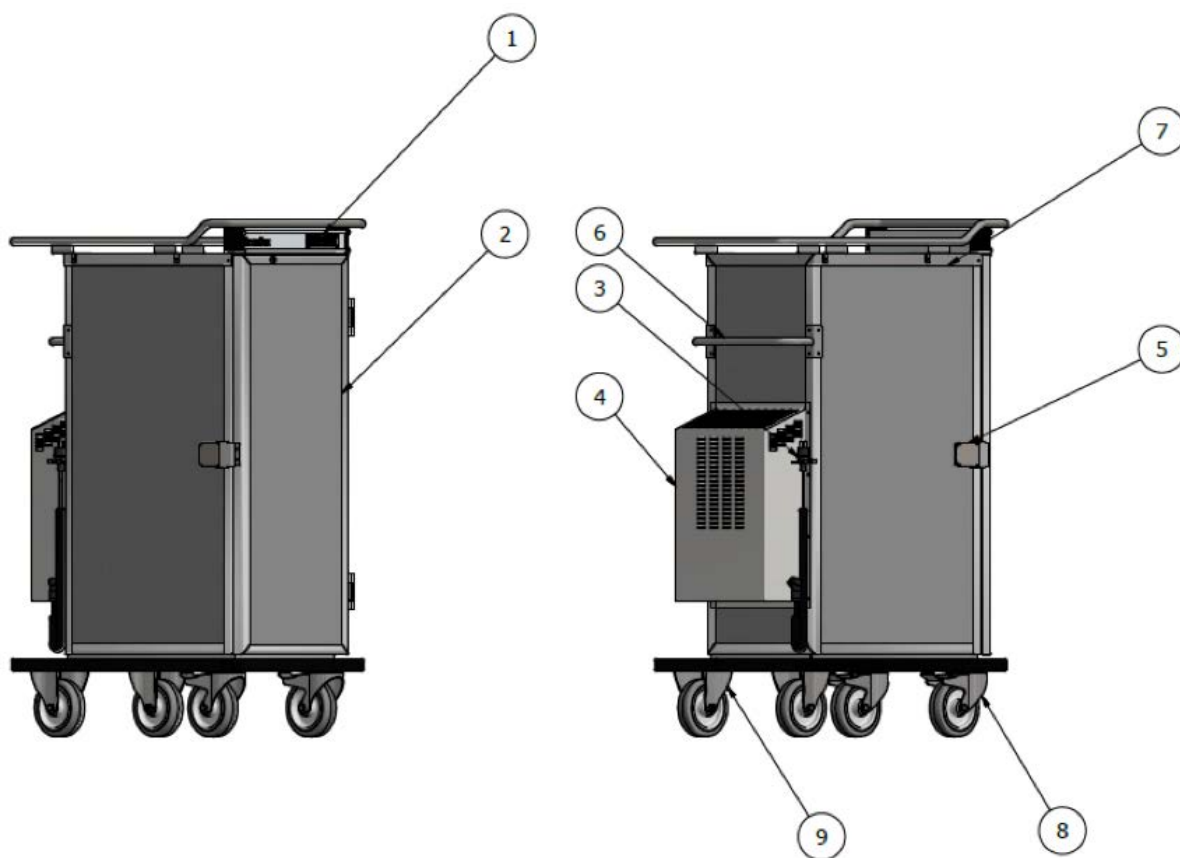

Number	Parts
1	Control Panel - Temperature Controller
2	Door
3	Plug
4	Protective cover over cooling compressor
5	Door Lock
6	Push/Pull Handle
7	Extra Loading Space
8	Front Castors with Brake and Swivel
9	Rear Castors

Control Panel



Up Arrow

Press this button to increase the temperature in the box.



Down Arrow

Press this button to decrease the temperature in the box.



Show Temperature Button

Displays the current temperature in the box.



Power Button

To start the box or put it in standby mode, press and hold the power button for three seconds.



Before using the product for the first time



Transport

- Inspect the boxes on arrival. In particular, ensure that no transport damage has occurred.
- If the goods are damaged from the transport, do not sign the carrier's documentation without claiming the transport damage.

Unpacking

Do not scratch the boxes when unpacking.

Recycling of Packaging Materials

ScanBox packaging materials can be returned to the recycling station.

First Cleaning

The boxes are cleaned by ScanBox personnel before they were transported, but you should always clean the boxes one more time before using them.

Commissioning

ScanBox products meet relevant electrical specifications. Before using the boxes for the first time, please follow below instructions:

- Make sure that the mains voltage is in accordance with the box's specification.
- The wall socket must be easily accessible making sure the box can be disconnected by hand without pulling the cord.
- Boxes with compressor cooling should not be transported while lying down. If the box has been laying down during transport, allow it to stand up for at least two hours before switching it on. This to ensure the compressor oil flows back into place.

Daily Use

The box should be connected to a grounded 220-240V single phase wall socket for 90-120 minutes before using the box. If the box is equipped with compressor cooling, 40-60 minutes is enough to cool the box to the desired level. The box comes with a spiral cable to be plugged into a wall socket at the appropriate height. The spiral cable is located on the back of the box.

After loading the food into the box, connect the box to a wall socket for another 10-15 minutes for best results. This allows the temperature to be restored after the frequent door openings during loading.

- The purpose of a box with active cooling is to hold and transport cold food, not to cool down food.

Boxes with compressor cooling meet climate class 4. This means that the boxes can keep an inside temperature of 3-8°C in an ambient environment with a temperature of 30°C and a humidity of 55% RH.

Boxes with peltier cooling meet climate class 0. This means that the boxes can keep an inside temperature of 3-8°C in an ambient environment with a temperature of 20°C and a humidity of 50% RH.

Declaration of Conformity with CE

This product meets the safety requirements of the Machinery Directive 2006/42/EC. In addition, the product complies with the EMC Directive 2014/30/EU and the 2011/65/EU Directive on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment ("RoHS2"). Furthermore, the manufacturer fulfills the requirements of Regulation 1907/2006/EC on the Registration, Evaluation, Authorization and Restriction of Chemical Substances ("REACH").

For the latest updates regarding "EU Declaration of Conformity", visit www.scanbox.se/en/support.

Chart – Technical Data

Name	Tare	Max Weight	Capacity GN 1/1	Width	Depth	Height
Ergo Line AC6 P*	50 kg	104 kg	6	540 mm	910 mm	960 mm
Ergo Line AC8 P*	55 kg	127 kg	8	540 mm	910 mm	1120 mm
Ergo Line AC10 P*	59 kg	149 kg	10	540 mm	910 mm	1280 mm
Ergo Line AC12 P*	65 kg	173 kg	12	540 mm	910 mm	1440 mm
Ergo Line AC14 P*	68 kg	194 kg	14	540 mm	910 mm	1600 mm
Ergo Line AC6 C*	50 kg	114 kg	6	540 mm	910 mm	960 mm
Ergo Line AC8 C*	55 kg	137 kg	8	540 mm	910 mm	1120 mm
Ergo Line AC10 C*	59 kg	159 kg	10	540 mm	910 mm	1280 mm
Ergo Line AC12 C*	65 kg	183 kg	12	540 mm	910 mm	1440 mm
Ergo Line AC14 C*	68 kg	204 kg	14	540 mm	910 mm	1600 mm
Banquet Line AC8	83 kg	227 kg	16	740 mm	1040 mm	1120 mm
Banquet Line AC10	87 kg	267 kg	20	740 mm	1040 mm	1280 mm
Banquet Line AC12	91 kg	307 kg	24	740 mm	1040 mm	1440 mm
Banquet Line AC14	95 kg	347 kg	28	740 mm	1040 mm	1600 mm
Banquet Line AC16	99 kg	387 kg	32	740 mm	1040 mm	1760 mm

*P = Peltier Cooling

*C = Compressor Cooling

Maximum weights are based on the following weight per runner:

Ergo Line = 9 kg (GN1/1)

Banquet Line = 9 kg (GN1/1) or 18 kg (GN2/1)



Maximum permitted weight per pan = 9 kg (GN1/1) or 18 kg (GN2/1)

The products' emission sound pressure is lower than 70 dB (A).

Ergo Line, Banquet Line, Banquet Master, Bakery Line & Under Counter Hot

Product Description

Overview

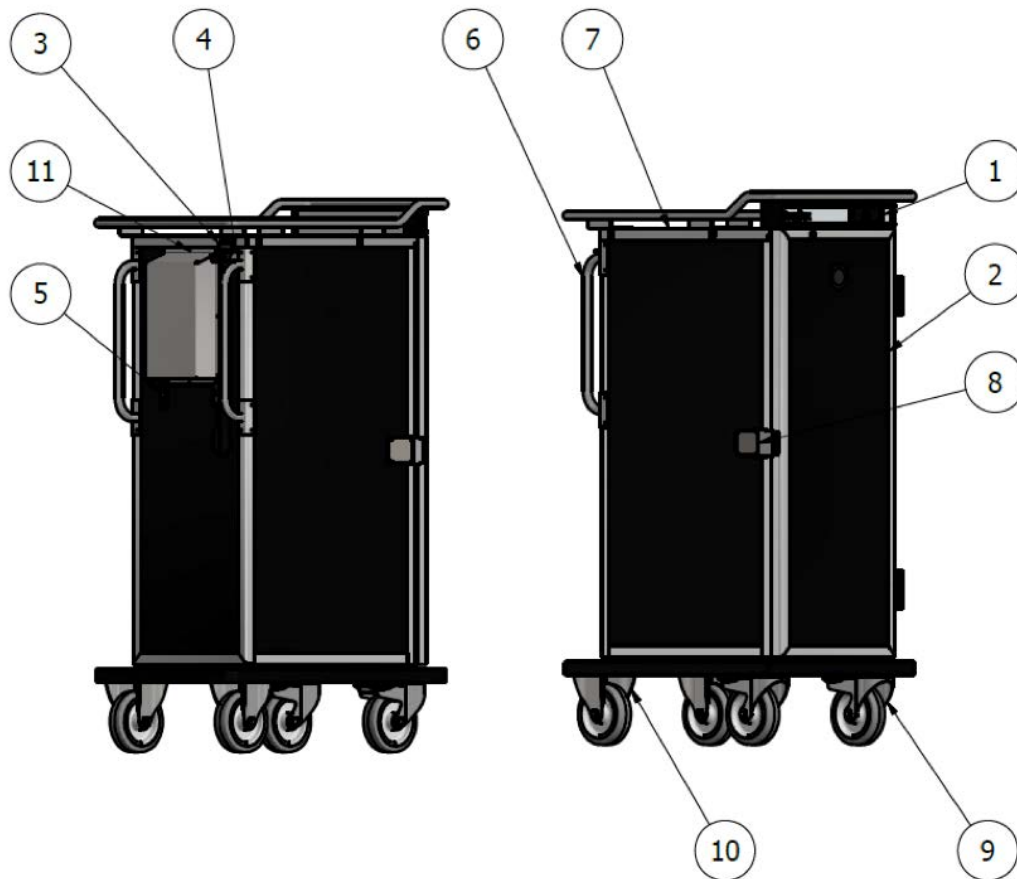

Number	Parts
1	Control Panel - Temperature Controller
2	Door
3	Plug
4	Suspension for spiral cord and plug
5	Spiral Cord
6	Handle / Impact Protection
7	Extra Loading Space
8	Door Lock
9	Front Castors with Brake and Swivel
10	Rear Castors
11	Protective Cover

Control Panel



Up Arrow

Press this button to increase the temperature in the box.



Down Arrow

Press this button to decrease the temperature in the box.



Show Temperature Button

Displays the current temperature in the box.



Power Button

To start the box or put it in standby mode, press and hold the power button for three seconds.



Before using the product for the first time



Transport

- Inspect the boxes on arrival. In particular, ensure that no transport damage has occurred.
- If the goods are damaged from the transport, do not sign the carrier's documentation without claiming the transport damage.

Unpacking

Do not scratch the boxes when unpacking.

Recycling of Packaging Materials

ScanBox packaging materials can be returned to the recycling station.

First Cleaning

The boxes are cleaned by ScanBox personnel before they were transported, but you should always clean the boxes one more time before using them.

Commissioning

ScanBox products meet relevant electrical specifications. Before using the boxes for the first time, please follow below instructions:

- Make sure that the mains voltage is in accordance with the box's specification.
- The wall socket must be easily accessible making sure the box can be disconnected by hand without pulling the cord.

Daily Use

Hot boxes should be connected to a grounded 220-240V single phase wall socket for 45-60 minutes before using the box. If the box is equipped with convection heating, 20 minutes is enough to heat up the box to the desired level. The box comes with a spiral cable to be plugged into a wall socket at the appropriate height. The spiral cable is located on the back of the box.

After loading the food into the box, connect the box to a wall socket for another 10-15 minutes for best results. This allows the temperature to be restored after the frequent door openings during loading.

- The purpose of boxes with active heat is to hold and transport hot food, not to heat up food.

Banquet Master - the roll-in rack for the combi oven must always cool down before rolling it into a Banquet Master. That is because the trolley and the food are very hot, which causes the temperature to rise above the desired level for hot holding.

Ambient boxes can be used to make shorter transports of hot food. Also, they can be used as cold boxes by cooling them down in refrigerated rooms or with eutectic plates.

Declaration of Conformity with CE

This product complies with the safety requirements of the Low Voltage Directive 2014/35/EU (for non-fan products) or the Machinery Directive 2006/42/EC (for products with a fan). In addition, the product complies with the EMC Directive 2014/30/EU and the 2011/65/EU Directive on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment ("RoHS2"). Furthermore, the manufacturer fulfills the requirements of Regulation 1907/2006/EC on the Registration, Evaluation, Authorization and Restriction of Chemical Substances ("REACH").

For the latest updates regarding "EU Declaration of Conformity", visit www.scanbox.se/en/support.

Chart – Technical Data

Name	Manufact. Code	Tare	Net Weight	Capacity GN 1/1	Width	Depth	Height
Ergo Line Ambient 6		44 kg	98 kg	6	540 mm	810 mm	960 mm
Ergo Line Ambient 8		48 kg	120 kg	8	540 mm	810 mm	1070 mm
Ergo Line Ambient 10		51 kg	141 kg	10	540 mm	810 mm	1230 mm
Ergo Line Ambient 12		55 kg	163 kg	12	540 mm	810 mm	1390 mm
Ergo Line Ambient 14		59 kg	185 kg	14	540 mm	810 mm	1550 mm
Ergo Line Hot 6 S*		45 kg	99 kg	6	540 mm	810 mm	960 mm
Ergo Line Hot 8 S*		49 kg	121 kg	8	540 mm	810 mm	1120 mm
Ergo Line Hot 10 S*		53 kg	143 kg	10	540 mm	810 mm	1280 mm
Ergo Line Hot 12 S*		58 kg	166 kg	12	540 mm	810 mm	1440 mm
Ergo Line Hot 14 S*		62 kg	188 kg	14	540 mm	810 mm	1600 mm
Ergo Line Hot 6 VK	VK*	46 kg	100 kg	6	540 mm	810 mm	960 mm
Ergo Line Hot 8 VK	VK*	50 kg	122 kg	8	540 mm	810 mm	1120 mm
Ergo Line Hot 10 VK	VK*	54 kg	144 kg	10	540 mm	810 mm	1280 mm
Ergo Line Hot 12 VK	VK*	59 kg	167 kg	12	540 mm	810 mm	1440 mm
Ergo Line Hot 14 VK	VK*	63 kg	189 kg	14	540 mm	810 mm	1600 mm
Banquet Line Ambient 12		68 kg	284 kg	24	740 mm	910 mm	1390 mm
Banquet Line Ambient 16		76 kg	292 kg	32	740 mm	910 mm	1710 mm
Banquet Line Hot 8		67 kg	211 kg	16	740 mm	910 mm	1120 mm
Banquet Line Hot 10		71 kg	251 kg	20	740 mm	910 mm	1280 mm
Banquet Line Hot 12		75 kg	291 kg	24	740 mm	910 mm	1440 mm
Banquet Line Hot 14		79 kg	331 kg	28	740 mm	910 mm	1600 mm
Banquet Line Hot 16		83 kg	371 kg	32	740 mm	910 mm	1760 mm
Banquet Master 20		80 kg	205 kg	-	850 mm	1040 mm	1915 mm
Banquet Master 40		97 kg	347 kg	-	980 mm	1160 mm	1996 mm
Under Counter H5		44 kg	89 kg	5	540 mm	810 mm	816 mm
Under Counter H5 Banquet		61 kg	151 kg	10	740 mm	910 mm	816 mm

*S = Static Heating

*VK = Convection Heating

Maximum weights are based on the following weight per runner:

Ergo Line = 9 kg (GN1/1)

Banquet Line = 9 kg (GN1/1) or 18 kg (GN2/1)

Maximum permitted weight per pan = 9 kg (GN1/1) or 18 kg (GN2/1)

The products' emission sound pressure is lower than 70 dB (A).

