


ERGO LINE (GN 1/1)
Duo - Neutral - Heating Fan

- ✓ **Two Boxes in Side-By-Side Configuration**
- ✓ **Superb Insulation Values**
- ✓ **TapSlam® - Push to open functionality**



ScanBox Ergo Line - Duo - Neutral - Heating - Fan is a range of products suited perfectly for any commercial kitchen operation requiring hot and cold holding or transport capacity. Designed with two fully separated box compartments in a side by side configuration. Intuitive controls, ergonomic design and a wide range of different sizes and accessories will guarantee a perfect match with your operation. Designed with ScanBox latest Environmental Performance (ExP) technology combining increased performance with a decreased environmental impact. Designed to fit equally well back of house as well as front of house allowing exterior branding options.

Function

Two boxes positioned side by side, equipped with a fan heating system that provides an exact and even heat distribution. The heater is safely positioned in the back of the unit where also the power plug is located. Adjustable temperature and moisture ventilation allows you to be in control of food quality. Heat up time approximately 25 minutes with quick heat recovery in case of frequent door

Standard Equipment

Backmounted Heating
Adjustable Temperature
Adjustable Moisture Vent
European Plug Type

Options

International Plugs

Capacity

Equipped with detachable stainless steel racks allowing the air to circulate freely inside the cavity. The u-shaped guides has a tilt-stop function securing the food container and lid during loading, unloading and transport. Variety of sizes and rack configurations allowing optimal usage of the box.

Standard Equipment

GN 1/1 80 mm distance
Detachables Racks
Tilt-Stop Function

Options

Optional level distance

Mobility

Lightweight, yet heavy duty. A solid design made for all types transports including truck. Equipped with non-marking, high quality double bearing castors for easy manoeuvrability even in cramped spaces. Precision moulded PPE insulation assures food temperature and safety when the box is not plugged into power.

Standard Equipment

Ø160 mm Castors
Transport Handles *4

Options

Optional Sized Castors
Stainless Steel Castors
Tow Bars

Ease of Use

Equipped with an intuitive and easy to use display conveniently positioned in front top of unit. Standard equipped with TapSlam®, a push to open functionality which makes it possible to open and close the door in a single movement. All-around top frame allows easy handling facing the unit from any direction. The 4,5 meter long single phase spiral cord is positioned on the back of the unit.

Standard Equipment

TapSlam® door lock
Digital Controller in Front

Options

Sight window
Central brake system
Tray holder foldable

Construction

A heavy duty yet lightweight construction based on a stainless steel framing, reinforced plastic exterior panels, solid high precision moulded polyurethane foam insulation and anodized aluminium interior. A smooth, hygienic and fully sealed inner cavity without welds or rivets. The frame, top hood and handles are in robust stainless steel.

Standard Equipment

Smooth Hygienic Cavity
S/S Framing
Extra loading space on top

Options
Exterior Design

Robust and elegant Scandinavian design made for both back of house as well as front of house operations. Possibility to choose different colours as well as adapting parts or the full box according to corporate branding. Use the design and let the box be a part of the full F&B experience.

Standard Equipment

Black Glossy Finish
Black (RAL 9005)

Options

Optional colors
Signature concept

Product Safety

High quality product Made in Sweden with high level of engineering details to performance, safety and ease of use. Thorough quality and safety testing through external third party. CE marked with complimentary EMC, RoHS, REACH and electrical safety testing.





Technical Specification


Model Serie



ERGO LINE - Duo - Neutral - Heating Fan

Product Models	NE08 + HF08	NE10 + HF10	NE12 + HF12	NE14 + HF14
Article Number	ELDNF08	ELDNF10	ELDNF12	ELDNF14
Active Heating				
Controller	Digital adjustable	Digital adjustable	Digital adjustable	Digital adjustable
Heat Source	Electric Element	Electric Element	Electric Element	Electric Element
Temperature Range	Ambient up to 90°C	Ambient up to 90°C	Ambient up to 90°C	Ambient up to 90°C
Heating Time *1	20 min	20 min	20 min	20 min
Energy consumption to operating temp *2	0,25 kWh	0,25 kWh	0,20 kWh	0,25 kWh
Capacity				
Standard	GN 1/1	GN 1/1	GN 1/1	GN 1/1
Pitch between levels	80 mm	80 mm	80 mm	80 mm
Number of 65 mm containers	8	10	12	14
Number of 100 mm containers	5	7	8	9
Number of 150 mm containers	3	4	5	6
Maximum load per rack	9	9	9	9
Maximum load in unit	72 + 72 kg	90 + 90 kg	108 + 108 kg	126 + 126 kg
Max total weight (full unit)	230 kg	275	320 kg	360 kg
Physical Attributes				
External dimensions (W x H x D) mm	1100 x 1065 x 810	1100 x 1225 x 810	1100 x 1385 x 810	1100 x 1545 x 810
Internal dimensions (W x H x D) mm	352 x 727 x 600	352 x 1047 x 600	352 x 1047 x 600	352 x 1207 x 600
Volume	154 + 154 Liter	187 + 187 Liter	221 + 221 Liter	255 + 255 Liter
Net weight (empty unit)	90 kg	95 kg	105 kg	115 kg
Door opening	270°	270°	270°	270°
Length of Powercable	4,5 m	4,5 m	4,5 m	4,5 m
Electrical Attributes				
Rated Voltage	220-240V / 1 phase	220-240V / 1 phase	220-240V / 1 phase	220-240V / 1 phase
Rated Frequency	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz
Rated Current	3,19 A	3,19 A	4,5 A	4,5 A
Power rating	700 W	700 W	1000 W	1000 W
IP Code *3	44	44	44	44

Dimension drawings

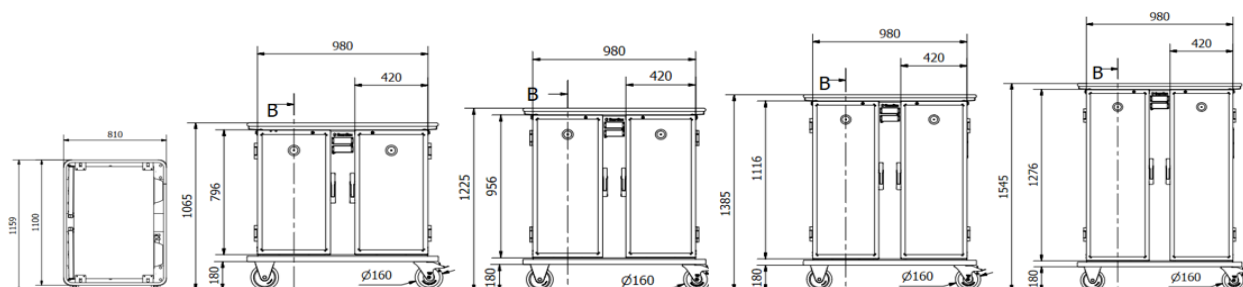

*1 - Time for a hot unit to reach 80 ° C and for a cold unit to reach 5 ° C average temperature in the air in the cavity with 22 ° C ambient temperature.

*2 - Operating temperature in hot unit of 80 ° C and in cold unit of 5 ° C with 22 ° C ambient temperature.

*3 - IP44 = Protection against penetration of solid objects larger than 1 mm and protected against splashing water from all angles (IEC 60529)

*4 - Recessed handles standard on ELDNF12 + ELDNF14