

UD

UNDERCOUNTER DISHWASHER /
GLASSWASHER

STARLINE

by **WASHTECH**



STANDARD FEATURES

- 1, 2 and 3 minute cycles
- Compatible with 435mm to 500mm racks
- Touchscreen controls providing advanced customisation
- 0.5HP soft start wash pump
- Dual chemical pumps
- Assured rinse c/w break tank and booster pump
- Polish-free glasswashing compatible
- Hands-free drainage system with sump and drain pump
- Heavy-duty stainless steel scrap tray and waste basket
- Adjustable tilting rack slide
- Independed stainless steel wash and rinse arms
- Uprateable power for rapid rinse recovery
- Heavy-duty stainless steel construction

- 1x 500mm dish rack (600 70028)
- 1x 500mm cup rack (600 70029)
- 1x cutlery container (C660503)

SPECIFICATIONS

A - Water^

Temperature	20-65°C*
Connection	3/4" male, hose supplied
Pressure	100-350kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

V	Hz	A/ph	Max kW
Single phase	230	50	15
Single phase	230	50	25
Three phase	400	50	15

Dimensions


Machine	Packed
Width (mm)	570
Depth (mm)	600
Height (mm)	840
Weight (kg)	75
Volume (m3)	0.39

Water Quality

Min	Max
pH	7
Hardness	20
Cl-	100
SO4	100
Fe	400
Mn	0.1
Cu	0.5
Cl2	0.05
	0.1

*Suitable for cold water supply although to avoid excessive delays between cycles a 1p/25A or 3p/15A power supply is recommended. Isolating switch must be within 1m of, and not directly behind, the machine. Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

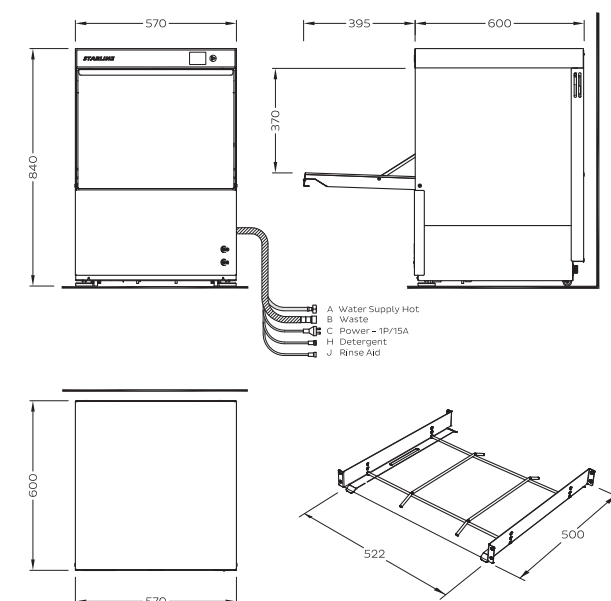

an Ali Group Company



the spirit of excellence