

M2C

Passthrough Dishwasher
c/w Heat Recovery Unit


STARLINE
by **WASHTECH**



STANDARD FEATURES

Integrated Heat Recovery Unit
No external extraction hood required*
1, 2 and 3 minute cycles
Touchscreen controls with versatile installation options
1.0HP soft start wash pump
Dual chemical pumps
Assured rinse with dual boilers plus rinse booster pump
Hands-free drainage system with sump and drain pump
Two-stage stainless steel wash and drain filtration
Heavy-duty stainless-steel construction and manifold
Independent stainless-steel wash and rinse arms
Compatible with 595mm to 640mm benchgaps

1x 500mm dish rack (600 70028)
1x 500mm cup rack (600 70029)
1x cutlery container (C660503)

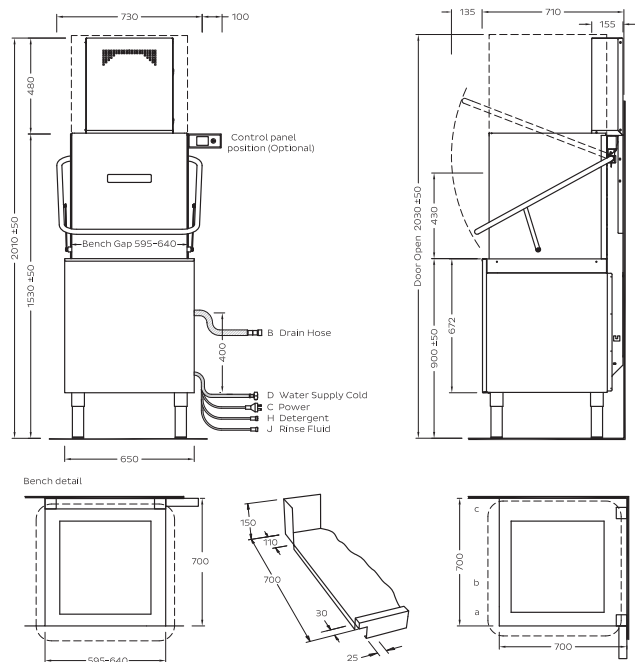

SPECIFICATIONS

D - Cold Water

Temperature	<25°C
Connection	3/4" male, hose supplied
Pressure	100-350kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

B - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

V	Hz	A/ph	Max kW	
Three phase	400	50	15	9.75**
Single phase	230	50	25	5.75

Dimensions

	Machine	Packed
Width (mm)	730	760
Depth (mm)	710	820
Height (mm)	2010	2015
Weight (kg)	118	142
Volume (m3)		1.1

Water Quality

	Min	Max
pH	7	8
Hardness	20	100
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Subject to adequate general ventilation. Full details and certification from SEED available on request.

**If connecting to single phase power supply the wash/rinse heating element interlock must be turned on.

Isolating switch must be within 1m of, and not directly behind, the machine. Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

Corner Installation Notes:

- Machine can be installed either direction, subject to suitable position for controls.
- Allow 300mm clearance to front for service access.
- Splashback return to be no higher than 150mm.

Touchscreen Control:

- Bracket supplied with controls enables install either side, under bench or on wall.
- Consult Operator Manual for full details on correct installation.

an Ali Group Company



the spirit of excellence