

ALC

High Capacity Passthrough Dishwasher
c/w Heat Recovery Unit

STARLINE
by **WASHTECH**



STANDARD FEATURES

- Integrated Heat Recovery Unit
- No external extraction canopy required*
- Recycles energy from steam to heat incoming water
- 50, 70 and 100 second cycles
- Compatible with 600mm x 500mm GN racks
- Touchscreen controls with versatile installation options
- Powerful 1.5HP soft start wash pump
- Insulated front hood
- Dual chemical pumps
- Assured rinse with dual boilers plus rinse pump
- Hands-free drainage system with sump and drain pump
- Two-stage stainless steel wash and drain filtration
- Heavy-duty stainless-steel construction and manifold
- Independent stainless-steel wash and rinse arms
- 1x 600mm GN tray rack (600 70042)
- 1x 500mm dish rack (600 70028)
- 1x 500mm cup rack (600 70029)
- 1x cutlery container (C660503)

SPECIFICATIONS

D - Cold Water

| | |
|---------------------|----------------------------|
| Temperature | <25°C |
| Connection | 3/4" male, hose supplied |
| Pressure | 100-500kPa |
| Flow | 10L per minute** |
| Backflow prevention | Atmospheric vacuum breaker |
| Consumption | 2.4L per cycle |

D - Drainage

| | |
|-----------------------|------|
| Drain pump flexi-hose | 25mm |
|-----------------------|------|

C - Electrical

| | | | |
|-------------|-----------|-------------|---------------|
| V | Hz | A/ph | Max kW |
| Three phase | 400 | 50 | 15 |
| | | | 10.80*** |


*Subject to adequate general ventilation. Full details and certification from SEED available on request.

**Suitable for connection to low flow water supplies.

***Single phase options possible although require modification by a Technician and will recovery time between cycles.

Isolating switch must be within 1m of, and not directly behind, the machine. Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

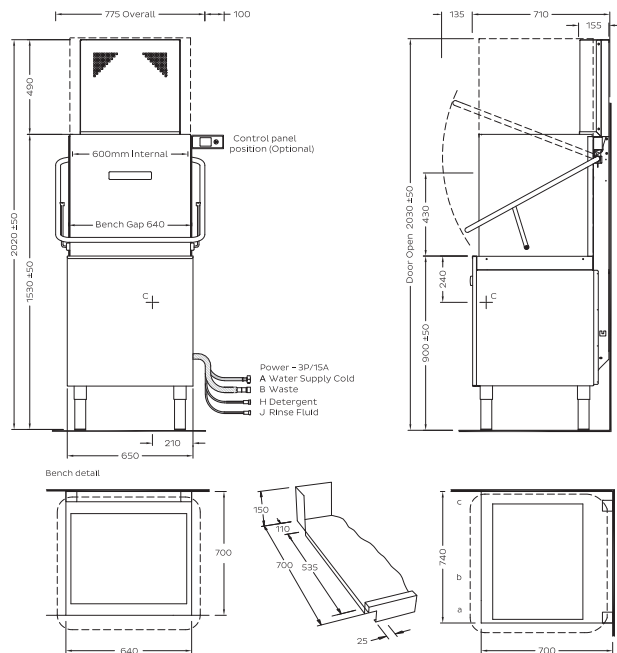

Dimensions

| | Machine | Packed |
|-------------|---------|--------|
| Width (mm) | 775 | 790 |
| Depth (mm) | 710 | 820 |
| Height (mm) | 2020 | 2015 |
| Weight (kg) | 115 | 135 |
| Volume (m3) | | 1.31 |

Water Quality

| | Min | Max |
|----------|-----|------|
| pH | 7 | 8 |
| Hardness | 20 | 100 |
| Cl- | | 100 |
| SO4 | | 400 |
| Fe | | 0.1 |
| Mn | | 0.5 |
| Cu | | 0.05 |
| Cl2 | | 0.1 |

Corner Installation Notes:

- Machine should be installed so racks are pushed into the back of the machine.
- Allow 300mm clearance to front for service access.
- Splashback return to be no higher than 150mm.

Touchscreen Control:

- Bracket supplied with controls enables install either side, under bench or on wall.
- Consult Operator Manual for full details on correct installation.