
specifications



Project:

TME650-A Series

ActiveCore Series, 1 Door (Glass), Upright Fridge

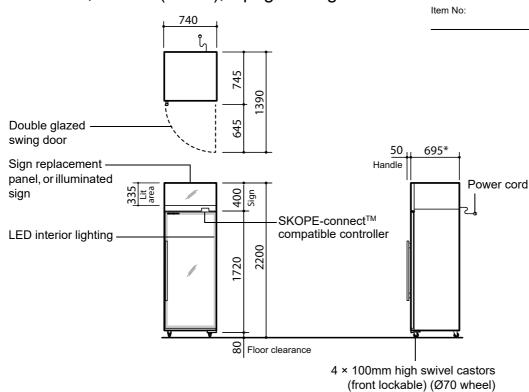

O A DINIET				
CABINET				
Model ID	TME650N-A	TME650N-AC		
SKOPE ID	SM65GYN	SM65BYN		
Doors	1 × self-closing, reversible, double glazed, single Low-E, lockable, argon			
	filled, toughened safety glass swing door (hinged RH)			
Internal door opening	1 × door openings: 1570mm high × 620mm wide			
Shelves	5 × adjustable height wire shelves: 625mm wide × 470mm deep			
Sign	Sign replacement panel Illuminated sign			
Material	Powdercoat galvanized steel			
PERFORMANCE				
Max. ambient temp.	43°C			
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)			
ELECTRICAL				
Climate class	5 (40°C/40% RH)			
Interior side lighting	1 × 1400mm, 15W LED 1 × 1400mm, 15W LED			
Interior shelf lighting	n.a.	n.a.		
Sign lighting	n.a.	1 × 670mm, 7W LED		
Power cord	Supplied with 2.3m, 10 Amp plug and lead			
Power supply	220-240 Volts a.c. 50 Hz, single phase supply			
Current draw	2.9 Amps (includes unit 2.6 Amps)			
REFRIGERATION	REFRIGERATION			
Controller	SCS Connect (SKOPE-connect [™] compatible)			
Connectivity interface	Bluetooth [®] wireless technology			
Refrigeration system	Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI- 0010)			
Refrigerant	, R290 / 99g (natural refrigerant)			
Nominal capacity	740 Watts			
Heat rejection (Avg/peak)	115 Watts/155 Watts			
Drainage	No plumbing required			

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673 Email: skope@skope.com, Website: www.skope.com

DIMENSIONS				
DIVILINGIONS				
	External	Internal		
Height	2200mm	1570mm		
Width	740mm	640mm		
Depth	745mm	554mm		
Floor area	0.55m ²	•		
Weight	170kg			
Volume		610 litres		

* Depth 695mm excludes removable door handle and door lock bracket

Dimensional tolera	nces	
Before installing this tolerances:	cabinet allow the fol	lowing dimensional
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements		
Тор	300mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0517 Rev. 2.2 Aug. 2019

