## specifications


## SIR Refrigeration

## **TME1500-A Series**

ActiveCore Series, 3 Door (Glass), Upright Fridge

Project:

Item No:

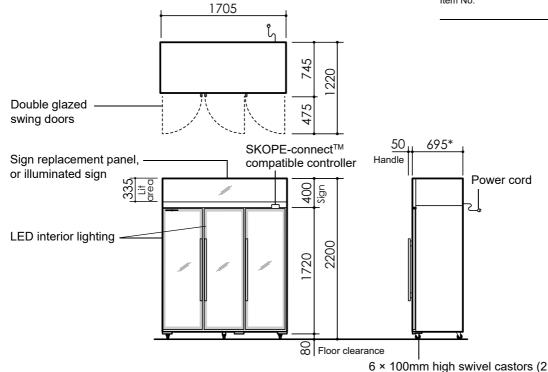

CABINET

Model ID

SKOPE ID

Doors

3 × self-closing, double glazed, double Low-E, argon filled, lockable, argon filled, toughened safety glass swing doors (hinged LH, RH, RH)

Internal door opening

Shelves

15 × adjustable height wire shelves: 500 wide × 470 deep (5 each side), 570 wide × 470 deep (5 middle)

2) wide x 470 deep (5 middle)

Sign Sign replacement panel Illuminated sign Material Powdercoat galvanized steel

**PERFORMANCE** 

Max. ambient temp. 43°C

Temperature range 1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)

**ELECTRICAL** 

Climate class 5 (40°C/40% RH)

Interior side lighting 3 × 1400mm, 15W LED 3 × 1400mm, 15W LED

Interior shelf lighting n.a n.a.

Sign lighting

n.a.

1 × 1590mm, 18W LED

Supplied with 2.3m, 10 Amp plug and lead

Power supply

220-240 Volts a.c. 50 Hz, single phase supply

Current draw 3.4 Amps (includes unit 2.6 Amps)

REFRIGERATION

Controller | SCS Connect (SKOPE-connect<sup>TM</sup> compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-

0010)

Refrigerant R290 / 99g (natural refrigerant)

Nominal capacity 740 Watts

Heat rejection (Avg/peak) 250 Watts/335 Watts
Drainage No plumbing required

 ${\sf SKOPE\ Industries\ Limited\ reserve\ the\ right\ to\ alter\ specifications\ without\ notice.\ Copyright\ @\ 2019\ SKOPE\ Industries\ Limited\ and\ property and\ prop$ 

## SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DIMENSIONS			
	External	Internal	
Height	2200mm	1570mm	
Width	1705mm	1605mm	
Depth	745mm	554mm	
Floor area	1.27m <sup>2</sup>		
Weight	320kg		
Volume		1497 litres	

front lockable) (Ø70 wheel)

\* Depth 695mm excludes removable door handle and door

Dimensional tolerances			
Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements	
Тор	300mm
Sides	Not required
Back	Not required
Bottom	Not required

PSS0519 Rev. 1.0 Aug. 2019



