


BME600-A Series

ActiveCore Series, 1 Door (Glass), Upright Fridge



Project:

Item No:

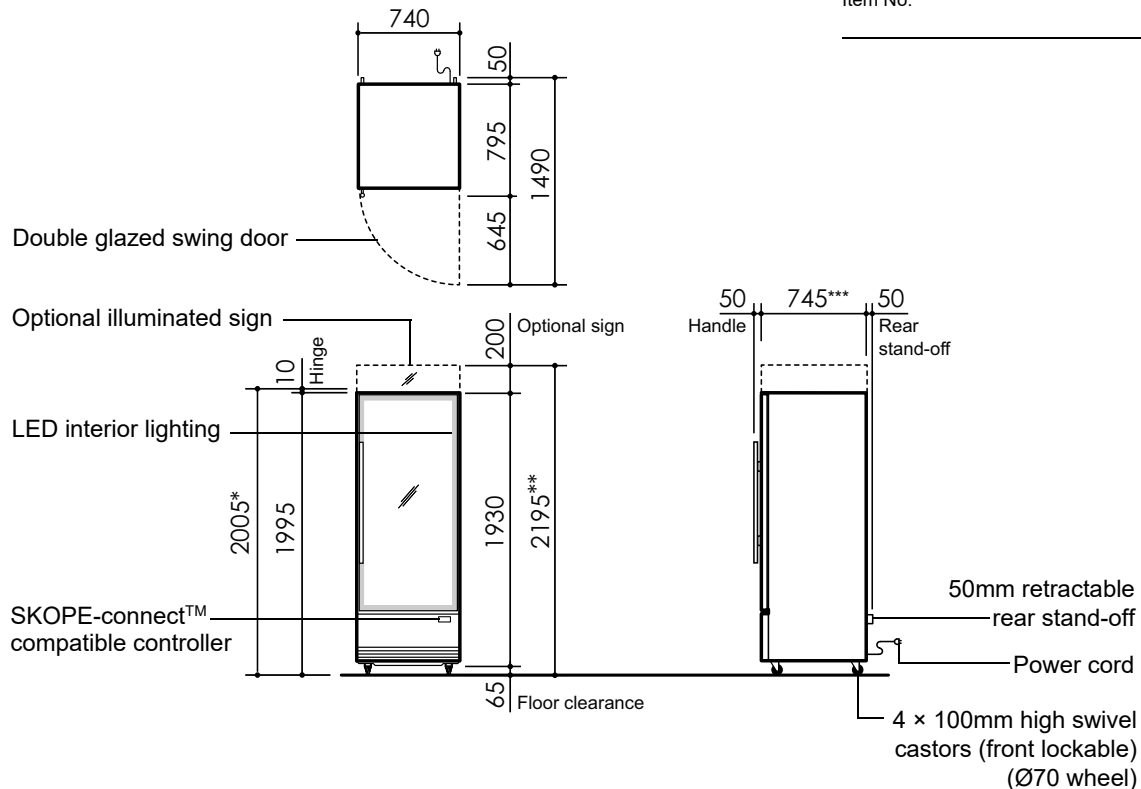

CABINET

Model ID	BME600N-A	BME600N-AC
SKOPE ID	SM60GYN	SM60BYN
Doors	1 × self-closing, reversible, double glazed, single Low-E, lockable, argon filled, toughened safety glass swing door (hinged RH)	
Internal door opening	1 × door openings: 1454mm high × 620mm wide	
Shelves	4 × wire and 1 × stainless steel	5 × wire and 1 × stainless steel
	Wire shelves: Adjustable height, 625mm wide × 520mm deep	
	Stainless steel bottom shelf: Not adjustable, 625mm wide × 515mm deep	
Sign	Sign replacement panel	Illuminated sign
Material	Powdercoat galvanized steel	

PERFORMANCE

Max. ambient temp.	43°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)

ELECTRICAL

Climate class	5 (40°C/40% RH)	
Interior side lighting	1 × 1370mm, 15W LED	1 × 1370mm, 15W LED
Interior shelf lighting	n.a.	n.a.
Sign lighting	n.a.	1 × 670mm, 7W LED
Power cord	Supplied with 2.0m, 10 Amp plug and lead	
Power supply	220-240 Volts a.c. 50 Hz, single phase supply	
Current draw	2.9 Amps (includes unit 2.6 Amps)	

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-0008)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	95 Watts/125 Watts
Drainage	No plumbing required

DIMENSIONS

Height	External 2005mm* / 2195mm**	Internal 1454mm
Width	740mm	640mm
Depth	795mm	602mm
Floor area	0.63m ²	
Weight	185kg	
Volume		584 litres

* Height 2005mm without sign (BME600-A)

** Height 2195mm with sign (BME600-AC)

*** Depth 745mm excludes removable door handle, door lock bracket and rear stand-off

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements

Ventilation requirements	
Top	50mm
Sides	Not required
Back	50mm
Bottom	50mm

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

PSS0520 Rev. 2.1 Aug. 2019

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

