
specifications

SKT500X Series

1 Door (Glass), Upright Fridge

Project: Item No:

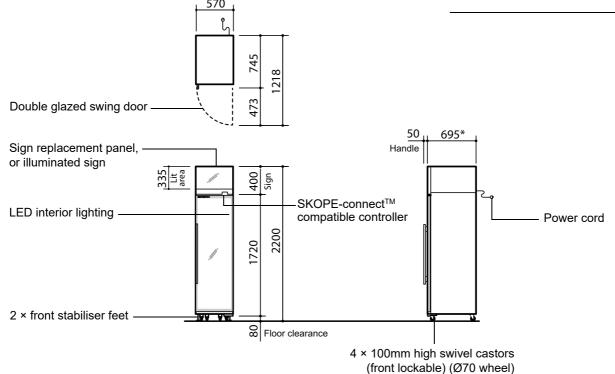

CABINET				
Model ID	SKT500XW	SKT500XW-C	SKT500XW-CX	
SKOPE ID	MT55GYW	MT55BYW	MT55BXW	
Doors		1 × self-closing, reversible, double glazed, single Low-E, lockable, argon filled, toughened safety glass swing door (hinged RH)		
Internal door opening	1 × door openings:	1 × door openings: 1570mm high × 450mm wide		
Shelves	5 × adjustable heigh	5 × adjustable height wire shelves: 445mm wide × 470mm deep		
Sign	Sign replacement pa	anel Illuminated sign	Illuminated sign	
Material	Powdercoat galvani	Powdercoat galvanized steel or stainless steel interior & exterior		
PERFORMANCE				
Max. ambient temp.	43°C			
Temperature range	1°C to 4°C (adjustat	ole via SKOPE-connect 1°	C to 15°C)	
	•			

ELECTRICAL

Climate class 5 (40°C/40% RH)

1 × 1400mm, 15W LED | 1 × 1400mm, 15W LED | n.a. Interior side lighting

5 × 415mm, 6W LED Interior shelf lighting n.a.

Sign lighting 1 × 500mm, 6W LED 1 × 500mm, 6W LED

Supplied with 2.3m, 10 Amp plug and lead Power cord Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 3.0 Amps (includes unit 1.8 Amps)

REFRIGERATION

SCS Connect (SKOPE-connectTM compatible) Controller

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable refrigeration unit (UT20APW)

Refrigerant R134a / 370g 581 Watts Nominal capacity

Heat rejection (Avg/peak) 140 Watts/185 Watts No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DIMENSIONS				
	External	Internal		
Height	2200mm	1570mm		
Width	570mm	470mm		
Depth	745mm	554mm		
Floor area	0.43m ²			
Weight	140kg			
Volume		445 litres		

* Depth 695mm excludes removable door handle and door

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements		
Тор	300mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	



