

PW2

Wide Body Front Loading Warewasher W 1235mm x D 860mm x H 1790mm

Starline warewashers are built to improve the efficiency of operations washing oversized and/or heavily soiled items, from bakeries to production kitchens, supermarkets to hospitals. This is achieved with a continuous and consistent wash process throughout the day that is easy on your staff. With highly efficient water consumption rates, Starline warewashers are also light on the environment and operating costs.

The PW2 is a powerful, highly durable, simple to use and easy to maintain front loaded warewasher. It features Starline hybrid controls which combine IP67 stainless switches, tried-and-tested switchgear, with a customisable electronic timer. Built with a large wash chamber and carefully counterbalanced split door, the PW2 is ideal for washing baking and GN trays, bins, bowls and other oversized items.


Since 1981 Starline dishwashers have been constructed in New Zealand from heavy duty stainless steel, and are engineered specifically for local conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Starline PW2 will not let you down.

Standard Features

- Versatile 2, 4, 6 minute wash cycles
- Large internal wash chamber with useable area of W 1100mm x D 650mm x H 750mm
- Low hot water consumption of 4.0 litres per cycle
- Starline hybrid controls
- Easy installation supplied with:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - No commissioning required
- Internal upper rail with optional and adjustable tines suited for hanging ladles, whisks and/or washing up to 20 baking or GN trays (up to 40mm deep) per cycle
- High powered dual wash systems
- Suitable for connection to low inlet water temperature and/or pressure (break tank and rinse pump fitted)
- Heavy-duty stainless steel construction and wash manifold
- Robust stainless steel wash and rinse arms with precision stainless steel jets
- Double heavy duty stainless steel filtration system including dual scrap trays and separate wash inlet filter
- Wash chamber easily accessible via insulated counter-sprung split door
- Comprehensive 24 month Starline warranty


Includes:

- 1 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 1 x cutlery basket (C660508)
- 1 x 435mm cup cover (k0452)
- 1 x potwasher rack grid (825 10004)
- 1 x upper hanging rail with adjustable tines (826 10228)



PW2

Wide Body Front Loading Warewasher
W 1235mm x D 860mm x H 1790mm

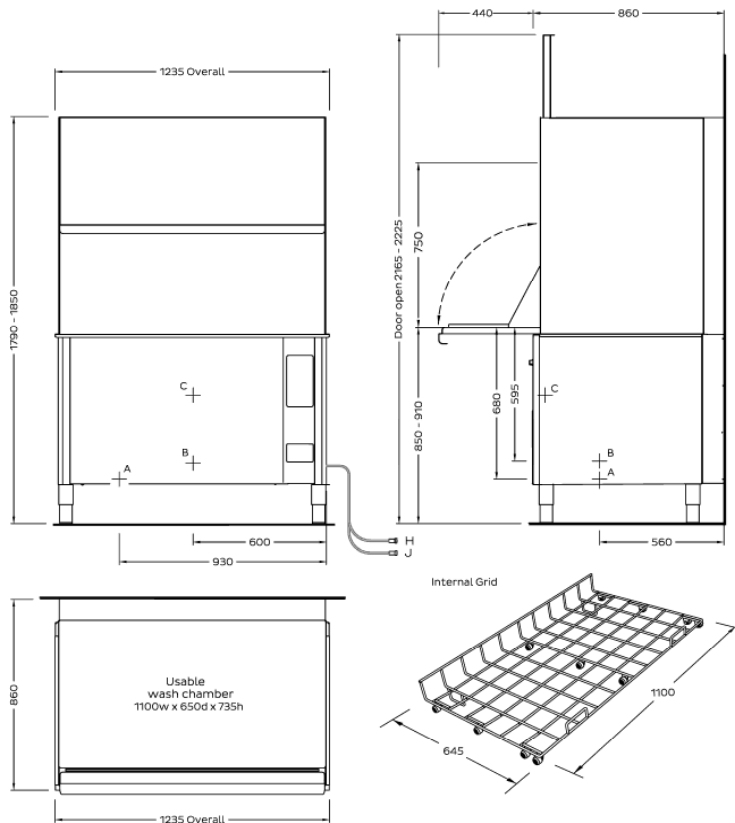

WASHTECH

WASHTECH LTD
PO Box 90-548
Auckland 1142
414 Rosebank Road
Avondale
Auckland 1026
New Zealand
Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz



ISO9001
All Starline products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.



Service and Support

On call service where you are. Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers. STARLINE SERVICE 09 829 0923

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Washtech 2016
Version 1907

A Hot water	Temperature	65°C			
	Connection	3/4" male; hose supplied			
	Pressure	200-350kPa			
	Flow	10 litres per min			
	Quality	Potable - refer table			
	Backflow Prevention	Atmospheric Vacuum Breaker			
	Consumption	4.0 litres per cycle			
B Waste	Connection	1.5" BSP male			
	Line	2.0" / 50mm minimum			
C Electrical	V	Hz	A/phase	max Kw	
	3P + N + E	400	50	30	19.50
	Option:				
	* 3P + N + E	400	50	20	12.00

Dimensions	Machine	Packed
Width	1235	1310
Depth	860	945
Height	1790	1830
Weight	220	276
Cubicmetres		2.18

Water Quality	Min	Max
pH	7	8
Hardness ppm	20	100
CL-		100
SO ₄		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl ₂		0.1

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine.

* Connection on lower power rating will reduce the wash and rinse heating, and delay the operation of the machine.