


# specifications

## SKT1500-A Series

ActiveCore Series, 3 Door (Glass), Upright Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

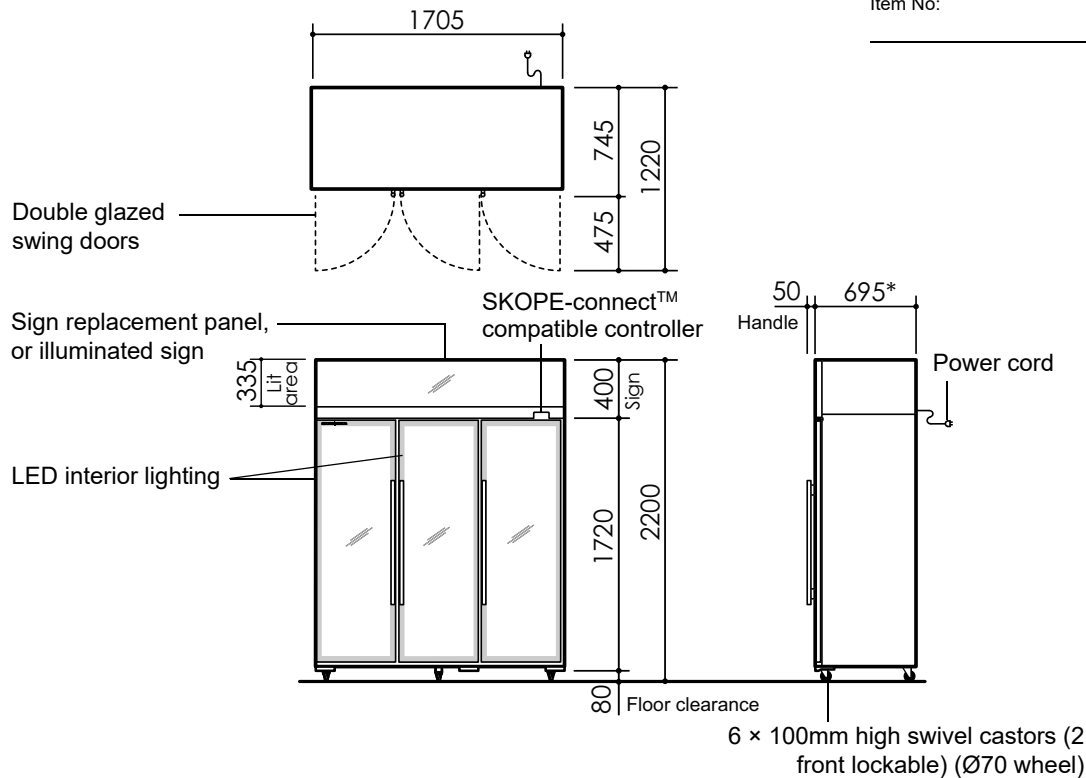

CABINET			
Model ID	SKT1500N-A	SKT1500N-AC	SKT1500N-ACX
SKOPE ID	MT15GYN	MT15BYN	MT15BYX
Doors	3 x self-closing, double glazed, double Low-E, argon filled, lockable, argon filled, toughened safety glass swing doors (hinged LH, RH, RH)		
Internal door opening	3 x door openings: 1570mm high x 450mm wide		
Shelves	15 x adjustable height wire shelves: 500 wide x 470 deep (5 each side), 570 wide x 470 deep (5 middle)		
Sign	Sign replacement panel	Illuminated sign	Illuminated sign
Material	Powdercoat galvanized steel or stainless steel interior & exterior		
PERFORMANCE			
Max. ambient temp.	43°C		
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)		
ELECTRICAL			
Climate class	5 (40°C/40% RH)		
Interior side lighting	3 x 1400mm, 15W LED	3 x 1400mm, 15W LED	n.a.
Interior shelf lighting	n.a.	n.a.	15 x 415mm, 6W LED
Sign lighting	n.a.	1 x 1590mm, 18W LED	1 x 1590mm, 18W LED
Power cord	Supplied with 2.3m, 10 Amp plug and lead		
Power supply	220-240 Volts a.c. 50 Hz, single phase supply		
Current draw	3.4 Amps (includes unit 2.6 Amps)		
REFRIGERATION			
Controller	SCS Connect (SKOPE-connect™ compatible)		
Connectivity interface	Bluetooth® wireless technology		
Refrigeration system	Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-0010)		
Refrigerant	R290 / 99g (natural refrigerant)		
Nominal capacity	740 Watts		
Heat rejection (Avg/peak)	310 Watts/400 Watts		
Drainage	No plumbing required		

DIMENSIONS		
	External	Internal
Height	2200mm	1570mm
Width	1705mm	1605mm
Depth	745mm	554mm
Floor area	1.27m <sup>2</sup>	
Weight	320kg	
Volume	1497 litres	

\* Depth 695mm excludes removable door handle and door lock bracket

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

PSS0570 Rev. 1.0 Aug. 2019

### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

