

EC 47 *XSafe EcoX* Self Contained Ice Machine 25 kg

Scotsman
Ice Systems

Item
Project
Quantity



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Ergonomically designed ice-storage access, with disappearing door.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

CONDENSING SYSTEM
Air cooled

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
220-240\60

Model	Cube	Ø	H	Weight
EC M	Medium	30 mm	34 mm	20 g

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 25 kg

April 2025


EC 47 *XSafe EcoX*

Self Contained Ice Machine 25 kg

Scotsman®
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 25 kg

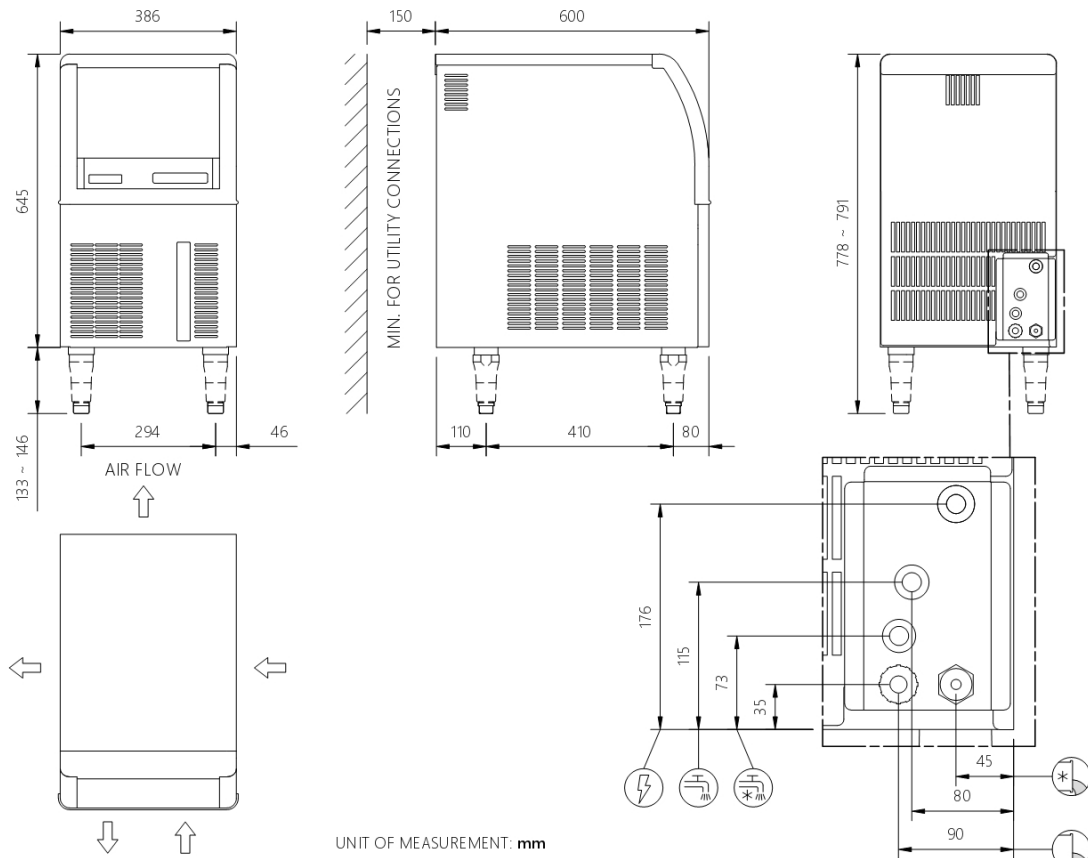

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)										
Net weight			Gross weight										
386 x 600 x 643 mm			760 x 670 x 460 mm										
38 kg			41kg										
			24 h ice production kg			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
			C Amb. / °C Water										
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/24h	l/h	W	No. x Ømm ²	A	
			kg	kg	kg								
ECM 47 AS EASY	220-240\60	A	25	24	17	9	0,7	7	3	400	3 x 1,5	10	