

AL

High Capacity Passthrough Dishwasher

STARLINE by WASHTECH



STANDARD FEATURES

- 40, 60 and 90 second cycles
- Compatible with 600mm x 500mm GN racks
- Touchscreen controls with versatile installation options
- Powerful 1.5HP soft start wash pump
- Insulated front hood
- Dual chemical pumps
- Assured rinse with dual boilers plus rinse pump
- Hands-free drainage system with sump and drain pump
- Two-stage stainless steel wash and drain filtration
- Heavy-duty stainless-steel construction and manifold
- Independent stainless-steel wash and rinse arms
- Upgradable boiler for sites with low temp/flow water
- Upgradable power for rapid rinse recovery

- 1x 600mm GN tray rack (600 70042)
- 1x 500mm dish rack (600 70028)
- 1x 500mm cup rack (600 70029)
- 1x cutlery container (C660503)

SPECIFICATIONS

A - Cold Water


Temperature	60°C
Connection	3/4" male, hose supplied
Pressure	100-500kPa
Flow	20L per minute*
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

V	Hz	A/ph	Max kW	
Three phase	400	50	15	9.00/10.80**

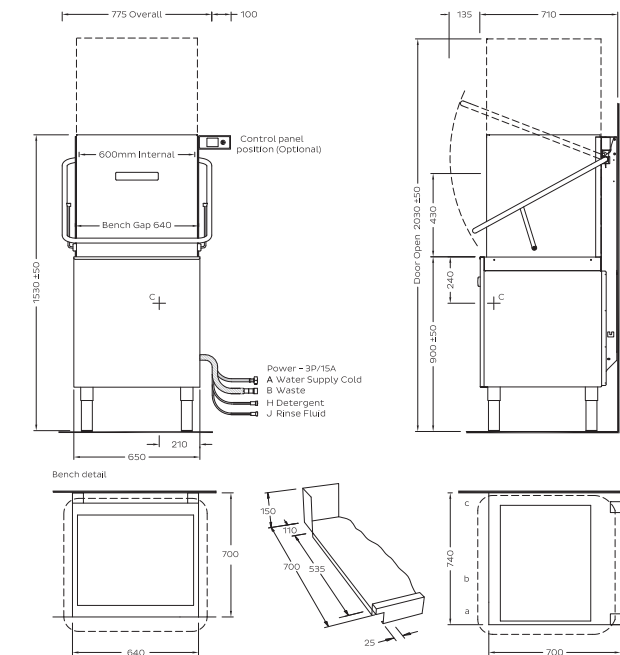

Dimensions

	Machine	Packed
Width (mm)	775	790
Depth (mm)	710	820
Height (mm)	1530	1470
Weight (kg)	110	130
Volume (m3)		0.95

Water Quality

	Min	Max
pH	7	8
Hardness	20	100
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Suitable for connection to cold and/or low flow water supplies, speak with your installer regarding optimal power and boiler configuration.

**To access full power on 3p, turn off wash/rinse heating element interlock. Isolating switch must be within 1m of, and not directly behind, the machine. Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

Corner Installation Notes:

- Machine should be installed so racks are pushed into the back of the machine.
- Allow 300mm clearance to front for service access.
- Splashback return to be no higher than 150mm.

Touchscreen Control:

- Bracket supplied with controls enables install either side, under bench or on wall.
- Consult Operator Manual for full details on correct installation.