

AL8x

PASSTHROUGH WAREWASHER

STARLINE


by **WASHTECH**



STANDARD FEATURES

- 60, 180 and 300 second cycles
- Washtech Hybrid controls
- Oversized wash chamber W700 x D540 x H650
- 2.0HP wash pump
- Dual chemical pumps
- Assured rinse including rinse pump
- Hands-free drainage system with sump and drain pump
- Two-stage stainless steel wash and drain filtration
- Heavy-duty stainless-steel construction and manifold
- Independent stainless-steel wash and rinse arms

- 1x 600 x 500mm dish rack (600 70042)
- 1x 600 x 500mm cup rack (600 70043)
- 1x cutlery container (C660508)
- 1x cutlery basket (C660503)
- 1x cup cover (K0452)
- 1x plumbing connection kit (water and chemical hoses)

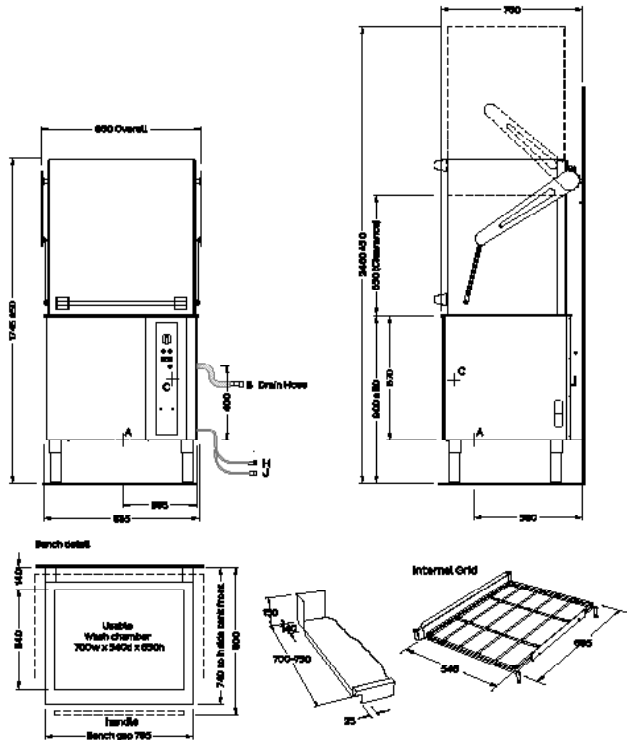

SPECIFICATIONS

A - Hot Water	Temperature 65°C*
Connection	3/4" male, hose supplied
Pressure	100-350kPa*
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.6L per cycle

B - Drainage	
Drain pump flexi-hose	25mm

C - Electrical	V	Hz	A/ph	Max kW
Three phase	400 - 415	50	15	10.50
Three phase	400 - 415	50	25	18.00**

Dimensions	Machine	Packed
Width (mm)	860	1000
Depth (mm)	760	910
Height (mm)	1745	2090
Weight (kg)	155	180
Volume (m3)		1.5

Water Quality	Min	Max
pH	7	8
TDS (ppm)	1	135
Hardness		100
Cl-		100
SO4		400
Fe		0.1
Cl2		0.1

*Suitable for connection to low temp and low flow water supplies.
 **Higher power mode removes wash/rinse heating interlock and is recommended for sites with cold water supply.

In line with policy to continually develop and improve its products, Washtech

Isolating switch must be within 1m of, and not directly behind, the machine
 Refer to operator manual for installation instructions



an Ali Group Company



the spirit of excellence