

AL8C

PASSTHROUGH WAREWASHER
C/W HEAT RECOVERY UNIT

STARLINE
by **WASHTECH**



STANDARD FEATURES

Integrated Heat Recovery Unit
No external extraction canopy required*
Recycles energy from steam to heat incoming water
Customisable 80, 200 and 320 second cycles
Touchscreen controls
Oversized wash chamber W700 x D540 x H650
2.0HP wash pump
Dual chemical pumps
Assured rinse plus rinse pump
Hands-free drainage system with sump and drain pump
Two-stage stainless steel wash and drain filtration
Heavy-duty stainless-steel construction and manifold
Independent stainless-steel wash and rinse arms

1x 600 x 500mm dish rack (600 70042)
1x 600 x 500mm base rack (600 70043)
1x cutlery container (C660508)
1x cutlery basket (C660503)
1x cup cover (K0452)
1x plumbing connection kit (water and chemical hoses)


SPECIFICATIONS

A - Hot Water (fill only) Temperature 65°C
D - Cold Water Temperature <25°C
Connection 3/4" male, hose supplied
Pressure 100-350kPa**
Flow 10L per minute
Backflow prevention Atmospheric vacuum breaker
Consumption 2.4L (cold) per cycle

B - Drainage

Drain pump flexi-hose 25mm

C - Electrical	V	Hz	A/ph	Max kW
Three phase	400 - 415	50	15	10.50
Three phase	400 - 415	50	25	18.00

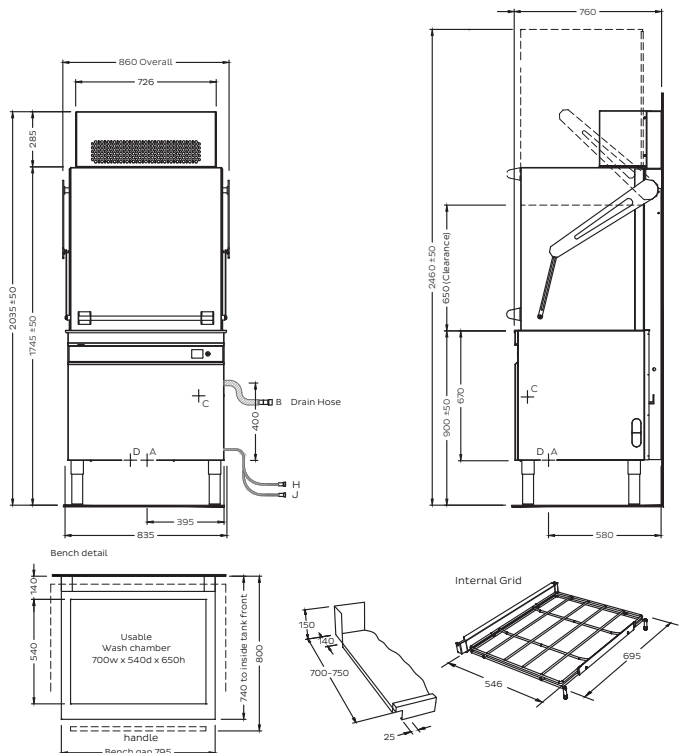

Dimensions

Dimensions	Machine	Packed
Width (mm)	860	1000
Depth (mm)	760	910
Height (mm)	2035	1970
Weight (kg)	180	203
Volume (m3)		1.8

Water Quality

Water Quality	Min	Max
pH	7	8
TDS (ppm)	1	135
Hardness		100
Cl-		100
SO4		400
Fe		0.1
Cl2		0.1

*Subject to adequate general ventilation. Full details and certification from SEED available on request.

**Suitable for connection to low flow water supplies.
Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

an Ali Group Company



the spirit of excellence