

WS-4

Undercounter Bedpan
Washer Sanitiser

WASHTECH®



STANDARD FEATURES

3 and 4 minute cycles including initial cold rinse, wash, flush/drain, followed by an extended sanitising rinse.

Washtech hybrid controls

Stainless steel wash and rinse arms

Dual stage stainless steel filtration system

Integrated detergent pump with prime switch and low warning light

Hands-free drainage with drain pump

370mm clearance

0.5HP wash pump

Heavy-duty stainless steel construction

1x stainless steel bedpan rack (220 10026)

1x 500mm cup rack (600 70029)


1x cutlery container (C660503)

SPECIFICATIONS

A - Hot Water	@ 65°C
D - Cold Water	@ 20°C
Connections	3/4" male, hose supplied
Pressure	200-350kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	7.0L per cycle

B - Drainage	
Drain pump flexi-hose	25mm

C - Electrical	V	Hz	A/ph	Max kW
Single phase	240	50	25	6.37

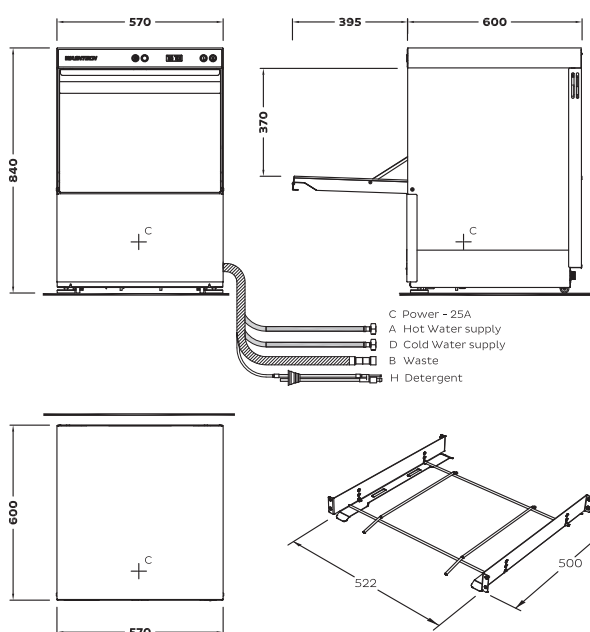

	Machine	Packed
Dimensions		
Width (mm)	570	605
Depth (mm)	600	660
Height (mm)	840	940
Weight (kg)	75	78
Volume (m3)		0.37
Water Quality	Min	Max
pH	7	8
Hardness	20	100
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Water consumption rates may vary based on site conditions.
Isolating switch must be within 1m of, and not directly behind, the machine.
Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products,
Washtech reserves the right to change specifications and design without
notice.