



LEGEND™ Heavy-Duty Gas Overfired Infrared Broiler with Plancha Top

Item No. _____

Project _____

Quantity _____



Model EC45SHBPL shown
with optional stainless steel sides

SHORT/BID SPECIFICATION

Broiler shall be a Montague **Legend** Heavy-Duty, **Steakhouse** Broiler with Plancha Top [Specify Model]

☐ **C36SHBPL** 36" (914mm) Wide

☐ **C45SHBPL** 45" (1143mm) Wide

...a gas-fired, infrared heated unit with 42,000 BTU/hr cast iron burners with individual controls, heating ceramic radiants mounted below a Spanish-style plancha with raised 1/2" (13mm) thick precision-ground cook surface, 3-sided perimeter grease trough with drop to grease receptacle. The broiler has a counter-balanced, height-adjustable, chrome-plated steel cooking grid that is drawer-mounted for easy pull-out access, with a full width grease deflector and large capacity front-mounted grease container; enclosed in an insulated cabinet with stainless steel front and mounted on 25" (635mm) high stainless steel modular stand with bottom shelf; plus all the features listed and options/accessories checked:

PLANCHA TOP FEATURES:

- 1/2" (13mm) thick raised polished steel plate
- Interior grease container
- 3-sided grease trough

BURNER/RADIANT SYSTEM FEATURES:

- 42,000 BTU/hr cast iron burners
- Ceramic radiants for uniform infrared heating
- Individual burner controls
- Standing pilot for automatic ignition

C36SHBPL or C45SHBPL Model

MODEL GUIDE

✓	Model No.	Overall Width	Grids	Cooking Area	
				Broiler	Griddle
	C36SHBPL	36" (914mm)	2	27" x 27" (686 x 686mm)	33" x 28" (838 x 711mm)
	C45SHBPL	45" (1143mm)	3	35" x 27" (889 x 686mm)	42" x 28" (1067 x 711mm)

ROLL-OUT GRID FEATURES:

- Chrome plated steel grid sections: two on C36 & three on C45
- Counter-balanced grid assembly for easy height adjustment
- Infinite grid height adjustment from 2" to 5" (51 to 127mm)
- Positive locking lift handle with cool ball-style grip
- Quiet, ball bearing mounted roll-out grid assembly
- Shielded horizontal grab-bar handle

STANDARD CONSTRUCTION FEATURES:

- Satin finish stainless steel front
- Broiler interior high-temp aluminized finish
- Other surfaces painted black with electrolytic zinc undercoating
- Full width grease deflector under rollout grid
- Extra-large capacity removable grease drawer [for broiler]
- 3/4" NPT rear gas manifold connection
- Stainless steel stand with 4" (102mm) base and 21" (533mm) tubular legs
- Height-adjustable bullet feet
- Stainless steel bottom shelf

AGENCY APPROVALS

- NSF Listed
- CSA Design Certified to ANSI Z83.11 • CSA 1.8
- Australian Gas Association Certificate Number 7466
- CE Approved EN 203-1



HDB-15 [Rev. 2/17]

LEGEND™ Heavy-Duty Gas Infrared, Overfired Broilers with Plancha Plate


C36SHPL or C45SHPL Model

Item No. _____

Project _____

Quantity _____

Dimensions in brackets are millimeters

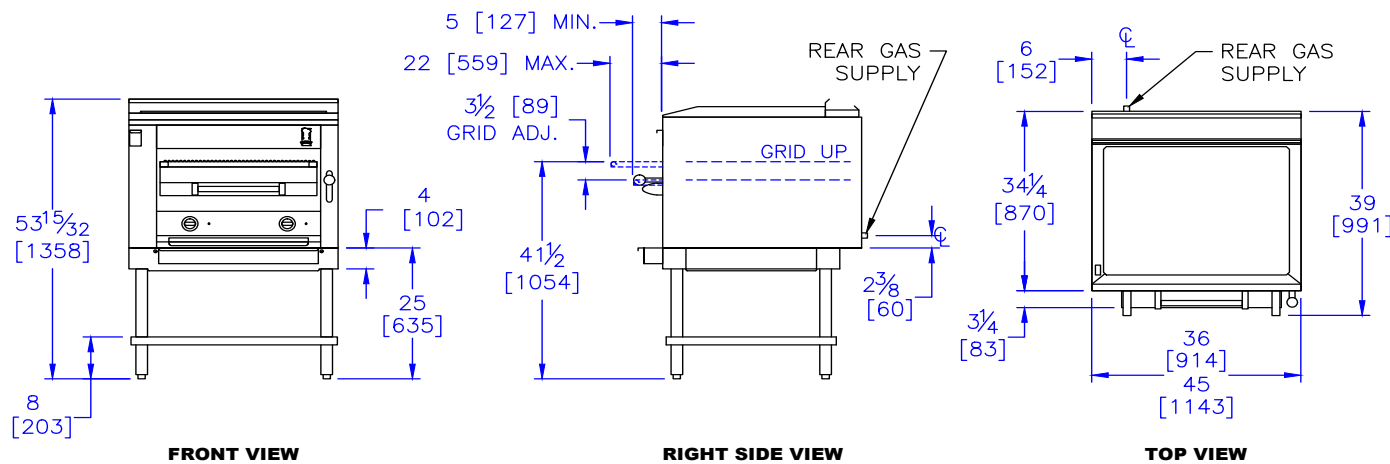

OPTIONS GUIDE:

Finish:

- ☐ Stainless steel full left side panel
- ☐ Stainless steel full right side panel
- ☐ Stainless steel back panel
- ☐ Stainless steel top

Plancha Plate:

- ☐ $3\frac{1}{4}$ " (19mm) thick Plancha Plate

General:

- ☐ Casters — set of four/six 5" (127 mm) casters
- ☐ **Flex Connector Kit**
[$3\frac{1}{4}$ "] or [1"] NPT:
☐ 3' (914mm) long ☐ 4' (1219 mm) long
- ☐ Insulated base - for countertop and refrigerated base mounting

International Approvals:

- ☐ CE-Conformite Europeene
Includes Flame Failure Valve Option
- ☐ AGA-Australian Gas Association
Includes Flame Failure Valve Option
- ☐ Canadian Approval

INSTALLATION REQUIREMENTS & SHIPPING INFORMATION

- Broilers must be installed in accordance with local codes or in their absence with the National Fuel Gas Code: ANSI Z22 3.1; CAN/CGA-B149.1 -Natural Gas and Propane Installation Code, as applicable. Compliance with codes is the responsibility of the Owner and Installer.
- An adequate ventilation system is required. Refer to National Fire Protection Association Standard No. 96, Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations.
- This appliance is intended for commercial use by professionally trained personnel. NOT intended for Residential Use.
- Specify installation elevation: _____ if above 2000 feet (610m).
- GAS INLET SIZE (All Models): $3\frac{1}{4}$ " NPT left-rear inlet. A $3\frac{1}{4}$ " NPT gas pressure regulator is provided and must be installed (by others) when unit is connected to gas supply.
- The incoming gas line pressure into the regulator should be 8"-14" w.c. for natural gas, and 12"-14" w.c. for propane gas.

Minimum Clearances	Combustible Construction	Noncombustible Construction
From Back Wall	6" (152 mm)	0"
Left & Right Side	6" (152 mm)	0"
With 21" (533mm) legs, suitable for use on combustible floor.		

Specify Type of Gas:		☐ Natural	☐ Propane	Shipping Weight	Shipping Class	Cube (Crated) ft ³ /m ³
Manifold Pressure:		6.0" WC	10.0" WC			
Models:	Burners	BTU/hr* (kW)	BTU/hr* (kW)			
C36SHBPL	2	84,000 (24.6)	84,000 (24.6)	483 lbs (219 kg)	85	35/1
C45SHBPL	3	126,000 (36.9)	126,000 (36.9)	638 lbs (289 kg)	85	47/1.3
Uncrated entry clearance: 33-1/2" (851mm)						

*Total, all burners

Due to continuous product improvements, specifications are subject to change without notice.



THE MONTAGUE COMPANY

1830 Stearman Avenue, Hayward, CA 94545

800 345-1830 • Fax: 510 785-3342

www.montaguecompany.com



HDB-15 [Rev. 2/17]