GLV
COMPACT UNDERCOUNTER DISHWASHER


STARLINE by WASHTECH





STANDARD FEATURES

1, 2 and 3 minute cycles
Compatible with 435mm to 450mm racks
Touchscreen controls providing advanced customisation
0.5HP soft start wash pump
Dual chemical pumps
Rapid recovery rinse tank and booster pump
Hands-free drainage system with sump and drain pump
Heavy-duty stainless steel scrap tray and waste basket
Adjustable tilting rack slide
Heavy-duty stainless steel wash and rinse arms
Heavy-duty stainless steel construction

1x 450mm dish rack (600 70081)
1x 450mm cup rack (600 70080)
1x cutlery container (C660503)

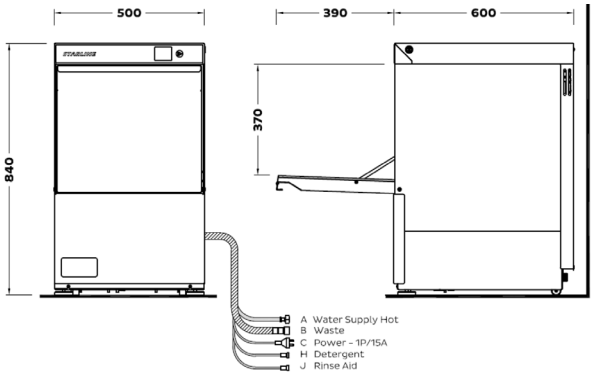





SPECIFICATIONS

A - Water	
Temperature	65°C*
Connection	3/4" male, hose supplied
Pressure	100-350kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

D - Drainage	
Drain pump flexi-hose	25mm

C - Electrical	**V**	**Hz**	**A/ph**	**Max kW**
Single phase	230-240	50	12	2.87
Single phase	230-240	50	22	5.37
Three phase	400-415	50	12	8.60

Dimensions	**Machine**	**Packed**
Width (mm)	500	540
Depth (mm)	600	640
Height (mm)	840	875
Weight (kg)	64	66
Volume (m3)		0.29

Water Quality	**Min**	**Max**
pH	7	8
Hardness	20	100
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

Isolating switch must be within 1m of, and not directly behind, the machine.
Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Washtech Limited / Starline GLV Series-8 / SGLV0040 / Oct-24

an Ali Group Company



the spirit of excellence