
M2C-NARROW

PASSTHROUGH DISHWASHER
NARROW GAUGE CABINET C/W HEAT RECOVERY UNIT

STARLINE by WASHTECH



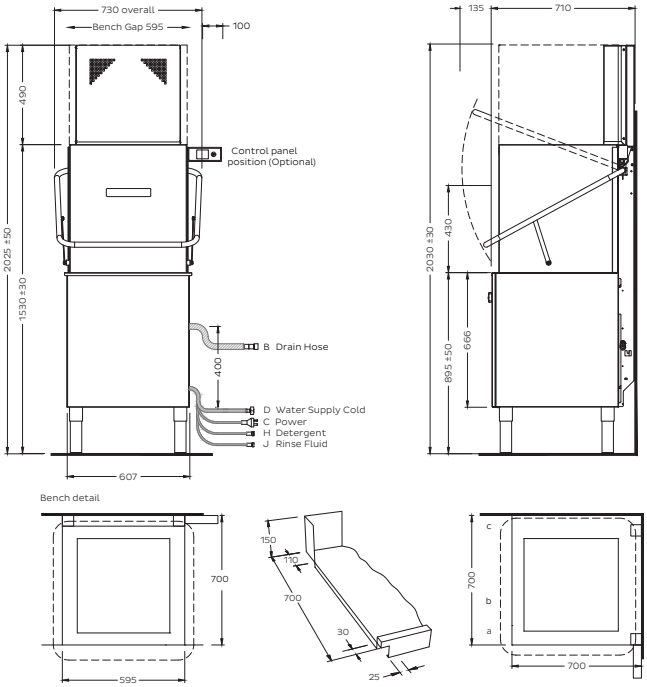

STANDARD FEATURES

Integrated Heat Recovery Unit
No external extraction canopy required*
Recycles energy from steam to heat incoming water
607mm cabinet width and 595mm benchgap
1, 2 and 3 minute cycles
Touchscreen controls with versatile installation options
1.0HP soft start wash pump
Dual chemical pumps
Assured rinse with dual boilers plus rinse pump
Hands-free drainage system with sump and drain pump
Two-stage stainless steel wash and drain filtration
Heavy-duty stainless-steel construction and manifold
Independent stainless-steel wash and rinse arms

2x 500mm dish rack (600 70028)
1x 500mm cup rack (600 70029)
1x cutlery container (C660503)

SPECIFICATIONS

D - Cold Water

Temperature	<25°C
Connection	3/4" male, hose supplied
Pressure	100-500kPa
Flow	10L per minute**
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

B - Drainage

Drain pump flexi-hose	25mm

C - Electrical	V	Hz	A/ph	Max kW
Three phase	400	50	15	11.25***

Dimensions	Machine	Packed
Width (mm)	730	760
Depth (mm)	710	820
Height (mm)	2025	2015
Weight (kg)	118	142
Volume (m3)		1.10

Water Quality	Min	Max
pH	7	8
Hardness	20	100
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Subject to adequate general ventilation. Full details and certification from SEED available on request.
**Suitable for connection to low flow water supplies.
***Single phase options possible although require modification by a Technician and will recovery time between cycles
Isolating switch must be within 1m of, and not directly behind, the machine.
Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

Corner Installation Notes:
a. Machine should be installed so racks are pushed into the back of the machine.
b. Allow 300mm clearance to front for service access.
c. Splashback return to be no higher than 150mm.

Touchsreen Control:
a. Bracket supplied with controls enables install either side, under bench or on wall.
b. Consult Operator Manual for full details on correct installation.

WASHTECH® washtech.co.nz

NEW ZEALAND MADE

© Copyright Washtech Limited / Starline M2C Series-5 narrow / SM2C0046 / Dec-25

an Ali Group Company



the spirit of excellence