

GL

Premium Undercounter Glass/Dishwasher – 435mm & 450mm Rack W 535mm x D 560mm x H 835mm

The Starline Premium Range are the most technologically advanced dishwashers in the Starline line up. They are built to deliver the best wash results alongside the latest enhancements such as advanced electronic controllers, soft close doors, advanced filtration full thermal, and acoustic insulation to provide an optimal operating environment around the machine. Our assured rinse system ensures consistently great rinsing every cycle, while the soft start functionality protects your glassware and crockery.

The Starline GL is the direct upgrade of the ever popular GM. Perfect for bars, cafes and other locations where high performance is required in a cool, calm environment. It is now possible to customise the colour of your GL to better match the style of your business, with a wide range of colours and finishes available.

Starline dishwashers have been made in New Zealand since 1981 and are engineered specifically for our unique local conditions and regulations. The renowned reliability of the machines is also backed by the most extensive service network and spare parts inventory in the country, ensuring that your Starline will not let you down.

Standard Features

- Quikstart 1, 2 and 3 minute cycles
- Washes up to 960 glasses per hour / 840 plates per hour
- Compatible with international 435mm and 450mm glass and dish racks
- QuikConnect Installation with everything you need including:
 - Water supply hose
 - Dual detergent and rinse aid pumps with injector lines
 - Drain pump outlet hose
 - 15 amp plugset (or easy 25Amp or 3P/15Amp connection for rapid recovery between cycles)
 - No commissioning required
- Reliable results through robust stainless steel rinse arms with precision stainless jets
- Durable stainless steel construction
- Comprehensive 12 month Starline warranty
- Low hot water consumption of 2.4 litres per cycle
- Assured final rinse ensures the correct temperature and pressures every time through 316 stainless break tank and rinse pump
- Soft start ensures great wash results through progressively pressurising the cycle to provide a consistent and even clean every time
- EcoPower reduces temperatures and energy consumption when machine is not busy
- Full thermal and acoustic insulation (via dual stainless steel panelling) provide a cooler and quieter operating environment
- Enhanced filtration system that allows you to drain it straight from the keypad, with no need to put your hand in the machine
- Soft close door enables smoother and quieter operation of the machine



Colour Options


Includes:

- 1x 600 70028 - 450mm dish rack
- 1x 600 70029 - 450mm cup rack
- 1x C660503 - cutlery container



GL

Premium Undercounter Glass/Dishwasher – 435 & 450mm Rack
W 535mm x D 560mm x H 835mm

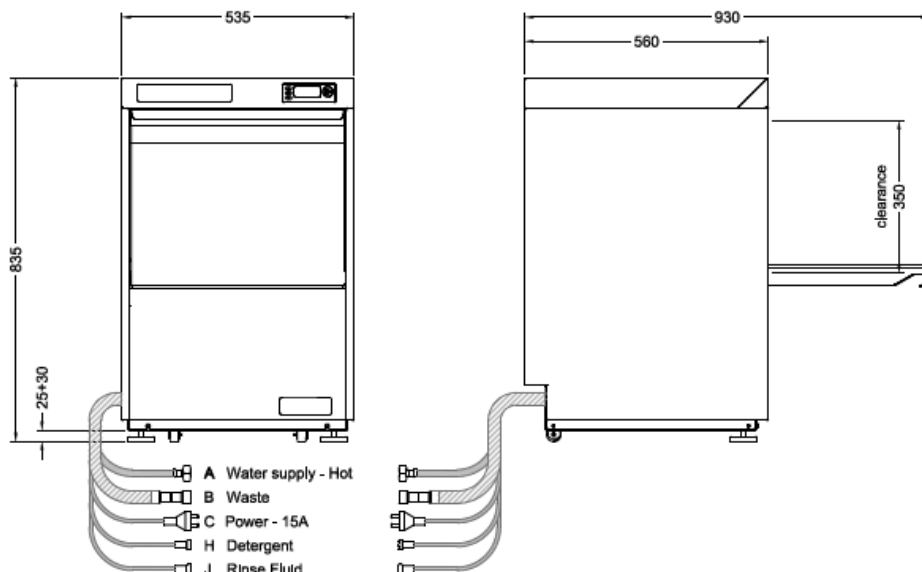

ISO9001

All Starline products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

WASHTECH LTD
PO Box 90-548
Auckland 1142
414 Rosebank Road
Avondale
Auckland 1026
New Zealand
Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz

A Hot water

Temperature	65°C
Connection	3/4" male; hose supplied
Pressure	200-350kPa
Flow	15 litres per min
Quality	Potable & soft
Backflow Prevention	Atmospheric Vacuum Breaker
Consumption	2.4litres per cycle

B Waste

Connection	Hose supplied for 38mm open standpipe 750 high or connection to sink trap
------------	---------------------------------------------------------------------------

C Electrical

Single phase	230V 50Hz 15Amp (plugset supplied)
Single phase	230V 50Hz 25Amp
Three phase	400V 50Hz 15Amp per phase

Nominal Power Consumption

1P / 15A	= 3.0kW rinse / 2.5kW wash / 3.15kW max
1P / 25A	= 6.0kW rinse / 2.5kW wash / 6.15kW max
3P / 15A	= 6.0kW rinse / 2.5kW wash / 9.0kW max

Dimensions

Width	535mm
Depth	560mm
Height	845mm
Weight	66kg

Packed Dimensions

Width	645mm
Depth	610mm
Height	970mm
Weight	77kg
Cubic metres	0.40m ³

Water Quality Requirements

Hardness	ppm	pH
Min	20	7
Max	100	8

Ions	Cl-	SO ₄	Fe	Mn	Cu	CL ₂
Max mg/L	100	400	0.1	0.5	0.05	0.1

Refer operator manual for installation instructions



On call service where you are. Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers. STARLINE SERVICE 09 829 0923 © Copyright Washtech 2016

an Ali Group Company



The Spirit of Excellence