


# specifications

## PG21.UPR.1.SD

ProSpec Series, 1 Door (Solid), Upright Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

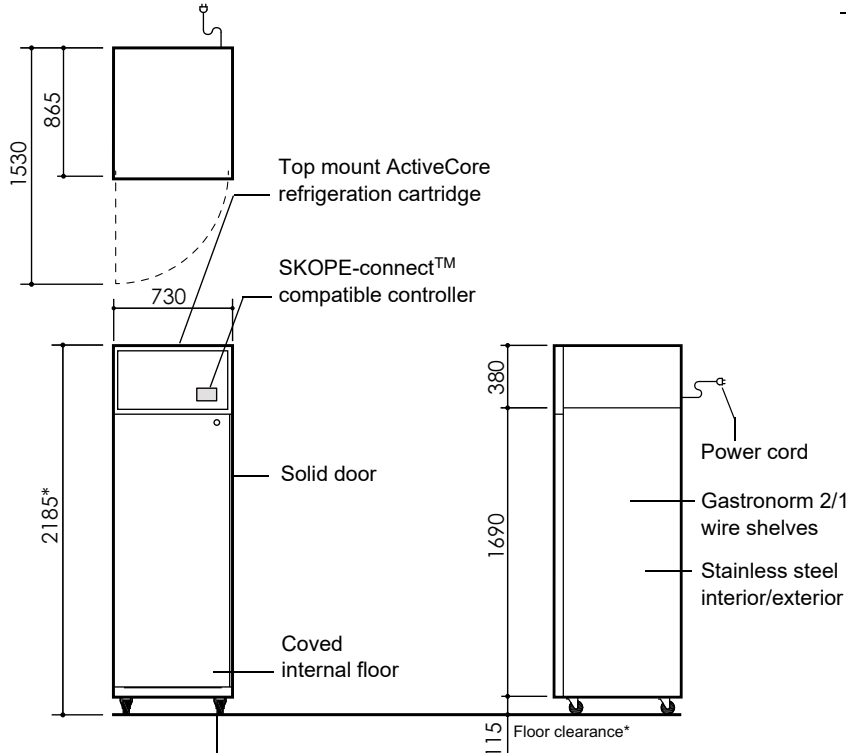

Supplied with removable height adjustable castors (Ø75mm wheel). Optional height adjustable legs available.

### CABINET

Model ID	PG21.UPR.1.SD
SKOPE ID	PP1R
Doors	1 × self-closing, lockable, solid swing door with stay-open position at over 90°
Internal door opening	1 × door openings: 1500mm high × 540mm wide
Shelves	5 × stainless steel GN 2/1 shelves: 530mm wide × 650mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior on all faces

### PERFORMANCE

Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
Total energy consumption	2.4 kWh/24h

### ELECTRICAL

Climate class	5 (40°C/40% RH)
Interior lighting	1 × 1400mm, 16W LED light (door activated)
Power cord	Supplied with 2.3m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	3.0 Amps (unit 2.6 Amps)

### REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Top mounted, integral, removable ActiveCore refrigeration unit (part number UTHCNI-0010)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	100 Watts/160 Watts
Drainage	No plumbing required

### DIMENSIONS

	External	Internal
Height	2185mm*	1500mm
Width	730mm	565mm
Depth	865mm	675mm
Floor area	0.63m <sup>2</sup>	
Weight	150kg	
Internal volume	572 litres	

\* With supplied castors fitted. See height variation below

### Height variation

Supplied castors	2185-2200mm
Optional height adjustable legs	2220-2250mm
No castors	2070mm

### Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

### Ventilation requirements

Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required