

NU 220 *XSafe*

Self Contained Ice Machine 109 kg

Item #:
Project:
Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NU 220
Dice 10 g
W 22 x D 22 x H 22 mm



NU H 220
Half Dice 6 g
W 10 x D 22 x H 28 mm



NU L 220
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

37 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 109 kg

NU 220 *XSafe*

Self Contained Ice Machine 109 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 109 kg

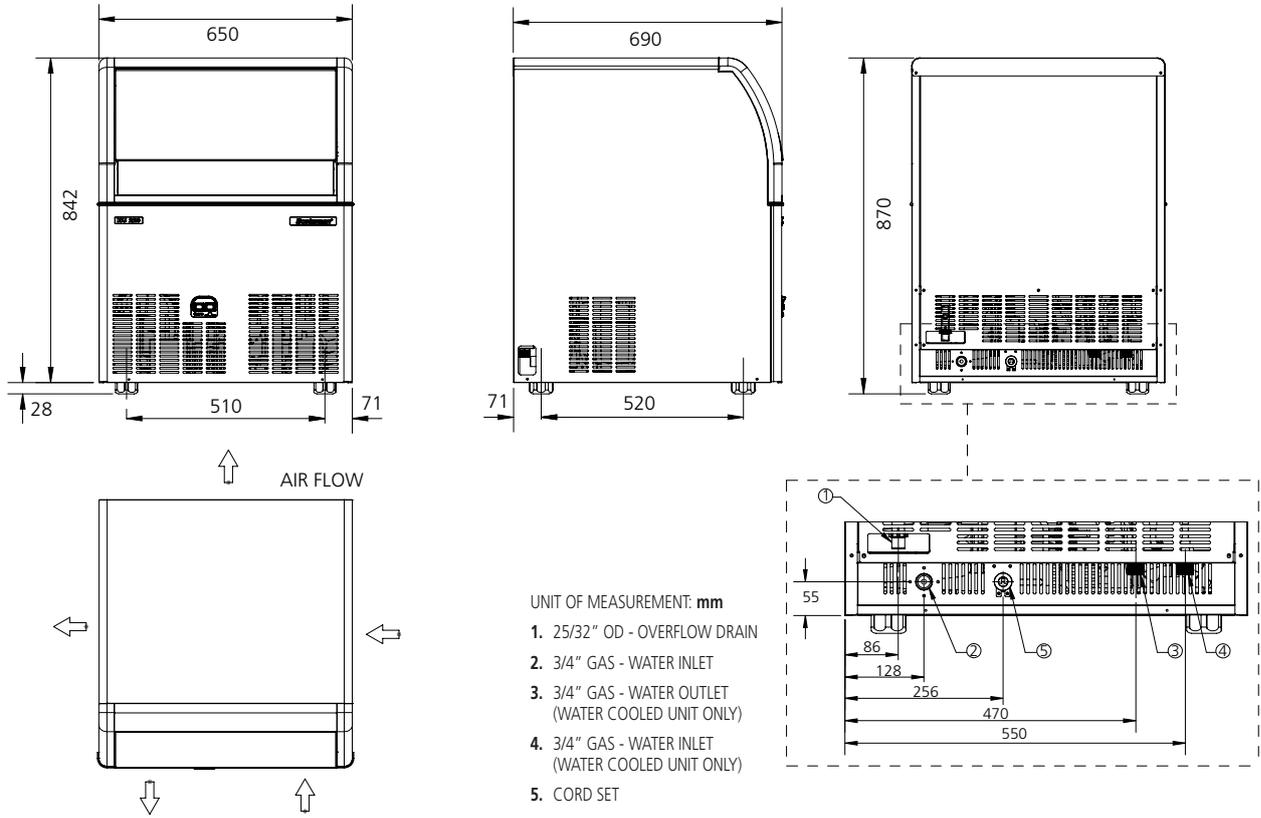

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions								
Size (W x D x H)	650 x 690 x 870 mm	Carton (W x D x H)	730 x 770 x 1015 mm									
Net weight	63 kg	Weight	77.5 kg									
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm ²	A	
NUH 220 AS	230/50/1	104	98	65	19.8	12.9	4.5	600	1266	3 x 1.5	10	
NUH 220 WS	230/50/1	104	98	85	12.1	10.2	68.7	600	1266	3 x 1.5	10	
NUL 220 AS	230/50/1	105	95	70	19.8	13.9	4.8	600	1266	3 x 1.5	10	
NUL 220 WS	230/50/1	105	95	80	12.1	9.7	64.7	600	1266	3 x 1.5	10	
NU 220 AS	230/50/1	109	100	70	19.8	13.9	4.8	600	1266	3 x 1.5	10	
NU 220 WS	230/50/1	109	100	85	12.1	10.3	68.7	600	1266	3 x 1.5	10	